Journal of Cleaner Production 208 (2019) 850–868

Contents lists available at ScienceDirect

Journal of Cleaner Production

journal homepage: www.elsevier.com/locate/jclepro

Carbon accounting framework for decarbonisation of European city neighbourhoods

Riccardo Maria Pulselli [a, b], Michela Marchi [a], Elena Neri [a, b], Nadia Marchettini [a, *], Simone Bastianoni [a]

[a] Ecodynamics Group, Department of Physical, Earth and Environmental Sciences, Pian dei Mantellini 44, 53100, Siena, Italy
[b] INDACO$_2$ srl, Colle di Val d'Elsa, Siena, Italy

ARTICLE INFO

Article history:
Received 25 June 2018
Received in revised form
2 October 2018
Accepted 9 October 2018
Available online 10 October 2018

Keywords:
Decision support system
Carbon footprint offset
Energy saving
Renewable energy
Sustainable mobility
Waste management

ABSTRACT

Strategies for climate change mitigation in European cities have become more urgent and require actions to proactively involve administrators, citizens and other stakeholders and let them cooperate to accomplish widely approved plans for decarbonisation. Nevertheless, considering the short term of political mandates and the instability of social-economic-legal variables in our changing world, urban planning practices will require more effective and rapid decision support systems to easily access and process information. The paper presents an optimised carbon accounting methodology to assess greenhouse gas (GHG) emissions in specific urban environments and inform urban policies and design. In particular, this procedure, substantially inspired by the IPCC standard methodology for GHG emissions inventory of Nations, constitutes the framework of a "mediate model" with a dual role: to both assess the Carbon Footprint of urban neighbourhoods and to estimate the effects, in terms of Carbon Footprint mitigation, of action plans addressed to carbon neutrality. For demonstration, the carbon accounting framework has been performed based on average European values. The procedure started by profiling the typical household as functional unit, whose carbon footprint has been estimated 6.93 t CO_2-eq/yr, referring to energy use for housing and mobility, domestic waste treatment and water use. The impact of the average European neighbourhood has been obtained by scaling up to 10,000 households (23,000 inhabitants) as benchmark for future applications. An additional outcome concerns the innovative spatial visualisation of results in terms of equivalent forestland (e.g. the emission of one average European household corresponds to the quantity of CO_2 yearly absorbed by 0.51 ha of forest), that allows for understanding intensity and size of impacts in order to consistently support awareness raising initiatives targeting citizens and stakeholders and communication-dissemination activities.

© 2018 Elsevier Ltd. All rights reserved.

1. Introduction

The European Union (EU) has ambitious plans to drive the transition towards climate neutral societies (EU, 2007; Skjærseth, 2016). The low-carbon economy roadmap states that EU should cut 80% of greenhouse gas (hereafter GHG) emissions (below 1990 levels) by 2050 (EU, 2011). Considering that the current global share of renewable energy is around 11% and the potential contribution of renewable sources is estimated around 60% (UN Human Settlements Programme, 2016), the world energy transition is still at its early stage.

In the last few years, the global population living in cities has been progressively growing: 54% of the world population was living in urban areas in 2014 and an increase up to 66% is expected by 2050 (UN, 2015). Cities represent more than 70% of global energy demand (UN Human Settlements Programme, 2016) and account for nearly three-quarters of anthropogenic GHG emissions (Kennedy and Sgouridis, 2011; Premalatha et al., 2013). Towns with high population density should be targeted through specific policies. The 90% decrease of GHG emissions from private and public buildings (EU, 2018) and the energy transition from fossil fuels towards fully electrified systems (EU, 2013) are among the objectives pursued. The chances to reach the goal will mostly depend on our ability to reimagine cities.

The Carbon Neutral Cities Alliance (CNCA) is among the world partnerships established to plan actions and achieve long-term

* Corresponding author.
E-mail address: nadia.marchettini@unisi.it (N. Marchettini).

https://doi.org/10.1016/j.jclepro.2018.10.102
0959-6526/© 2018 Elsevier Ltd. All rights reserved.

carbon reduction goals (Lehmann, 2013; CNCA, 2018). In this regard, the Global Protocol for Community-Scale GHG Emissions Inventories (GPC), released by the World Resources Institute (WRI) and the World Business Council for Sustainable Development (WBCSD), provides a worldwide standard approach for the GHG emissions accounting at the urban scale (GHG Protocol, 2014). In particular, it shows a robust framework for data collection in compliance with standard methodologies, e.g. 2006 Intergovernmental Panel on Climate Change (IPCC) Guidelines (IPCC, 2006). According to the GPC, GHG emission sources can be located inside or outside the urban boundary and classified into three categories, namely scope 1 (emissions occurring within the city), scope 2 (electricity, steam, heat, and cold supplied by grids crossing city boundaries) and scope 3 (emissions occurring outside). Separate accounting of the three scopes avoids double counting. The GPC standard has been designed to aggregate various city and urban neighbourhood inventories at subnational and national levels in order to improve quality of data, measure the contribution of urban mitigation actions relative to regional or national GHG emissions reduction targets, identify innovative strategies for GHG mitigation (GHG Protocol, 2014).

Based on a survey of literature, a few studies and experiences have been published concerning assessments and interventions at the neighborhood scale. Koch et al. (2012) highlighted that solutions for GHG emissions reduction have been mostly developed at wider scales, although the intermediate scale of city neighbourhoods has a higher potential to accomplish concrete actions such as by designing high-performance buildings and settlements. Stephan et al. (2013) monitored energy consumption and GHG emissions of a representative low-density neighbourhood in Melbourne (AUS) and compared different scenarios depending on transport technologies, house size and typology. They demonstrate that higher population density (e.g. apartment buildings instead of detached houses) would decrease the energy demand of the neighbourhood by 20%. Marique and Reiter (2014) presented a simplified calculation method to investigate feasibility of zero emissions energy supply in existing neighbourhoods (both urban and rural) focussing on transportation and building energy sectors. An accurate equations framework for calculating GHG emissions reduction, energy saving and production of energy from renewable sources has been implemented in the methodological report for the Covenant of Mayors in Emilia Romagna (Regione Emilia Romagna, 2013). Moreover, Marchi et al. (2018) presented an equations framework for calculating energy saving and waste reduction/management of the historic centre of Siena (Italy) based on statistical data scaled down by the regional contest (Bastianoni et al., 2014).

The aim of the present study is to propose a methodological approach for accounting GHG emissions and CO_2 absorptions in European neighbourhoods. The accounting method is reasonably based on the worldwide-accepted standard methodologies, particularly the 2006 IPCC Guidelines and the GPC (limited to scopes 1 and 2) (IPCC, 2006; GHG Protocol, 2014). Referring to average European activity data, the procedure starts from the assessment of GHG emissions provided by a single household and then estimates impacts at the neighbourhood level by scaling-up. A detailed equations framework has been provided concerning 25 measures and policies for decarbonisation to be potentially planned and accomplished. Compared to previous studies mentioned above, novelties consist in: profiling a single representative household as functional unit to scale up at the neighbourhood level (given the difficulty to assess direct data for cities or districts); operating a comprehensive carbon balance of the urban district taking into account a set of activity sectors, i.e. energy for housing, mobility of people, domestic waste and water, besides carbon uptake by local ecosystems (relevant aspects to plan energy policies); taking outcomes from the carbon accounting as the starting point to plan a progressive energy transition and design feasible decarbonisation scenarios. Moreover, a crucial aspect of the proposed method is the possibility to implement it in few working days, quickly collecting and processing data, and easily replicating the experience elsewhere.

This study is based on the experience of the City-Zen Project, funded by the European Commissions within the FP7-Energy-Smartcities-2013 program, addressed to zero energy cities (City-Zen Project, 2018).

2. Materials and methods

2.1. Carbon emissions accounting

The carbon accounting methodology shown in this study has been developed as part of the EU FP7 City-Zen Project (City-Zen Project) which, besides other tasks, aimed to establish a general approach for urban neighbourhood retrofitting in European cities for decarbonisation including the monitoring of carbon emissions and the estimate of the effects of mitigation measures. Built on few successful experiences of GHG inventories at subnational level (Bastianoni et al., 2014; Marchi et al., 2012), the procedure consists of an optimised assessment to inform urban design practices and provide credible and realistic results in a short time (likely in two/three working days). In other words, it is conceived as a mediate model that, through a scientific approach, acts as an intermediary with the society to inform policy makers, citizens and stakeholders about current situation and guide transition pathways. The accounting framework has been tested before its publication through a set of real residential neighbourhoods taken as test-beds during dedicated workshops, namely City-Zen roadshows (van den Dobbelsteen et al., 2018; Pulselli et al., 2018). Even though it presents assumptions and approximations, it has demonstrated to be a promising tool for addressing choices, making decisions easier to understand and agreed.

First step of this procedure is to provide a clear picture of the state of the art of urban districts in terms of GHG emissions as the initial condition to start from and plan integrated measures for neighbourhood retrofitting towards carbon neutrality. The Carbon Footprint (hereafter CF), here interpreted as the final result of the carbon accounting framework, measures the GHG emissions in a given city, urban district or neighbourhood. It is given in tons of carbon dioxide equivalents (t CO_2-eq), corresponding to the quantity of the three main greenhouse gases released into the atmosphere, i.e. carbon dioxide (CO_2), methane (CH_4) and nitrous oxide (N_2O), multiplied by the respective 100-year Global Worming Potential (GWP_{100}): CO_2 $GWP_{100} = 1$, CH_4 $GWP_{100} = 34$ and N_2O $GWP_{100} = 298$ (IPCC, 2013). The GWP measures the potential greenhouse effect (heat trapping) of a gas relative to an equivalent mass of carbon dioxide 100 years after its release into the atmosphere (e.g. methane is 34 times more effective than carbon dioxide).

The Carbon Accounting procedure concerns the selection of specific emission factors (EFs) to estimate the GHG emissions of each activity; for example, fossil fuel consumption is one activity considered and the amount of GHG emitted per unit of combusted fuel is the related emission factor (EF). Most of the EFs, expressed in kg CO_2-eq/unit activity, have been assessed on the bases of the 2006 IPCC Guidelines (IPCC, 2006), except for those that require site specific information and direct measurements. In particular, the EF of electricity depends on the local (regional) electric grid obtained by a mix of primary sources and a share of renewables. Considering the crucial role of electricity use in energy policies, the specific EF has to be assessed as a mandatory step of the procedure.

The basic inventory of data concerns energy demand in buildings including details on energy sources (electricity, natural gas and other fuels), mobility of people (especially focussing on private car use), waste and water management. Most of the difficulty for carbon accounting in cities, urban districts or neighbourhoods is the lack of activity data directly monitored. Data is usually available at the regional, provincial or municipal level and lower spatial details are rarely monitored. Dealing with urban neighbourhoods, some information such as population density, number of families/households and a few others can be collected per census unit or building blocks through GIS datasets, when available, and can be used for scaling down the other measures by allocation (top-down approach). In the meanwhile, a bottom-up approach is also recommended by collecting site-specific information on people attitudes and architectural typologies of housing. As a functional unit in the accounting framework, one representative household must be identified through an accurate investigation and profiling. Data sources can include local surveys (e.g. interviews with residents, check of energy bills), statistical reports at the municipal or district level (e.g. administrative officers, service providers, energy label records, GIS datasets), research studies available in literature (e.g. local universities, energy diagnosis of buildings).

Once collected, activity data are properly elaborated and aggregated representing different urban activities as main emissions sources. In particular, in order to figure out and ex-ante evaluate possible interventions of urban retrofitting, the profile of the typical household will refer to energy use, mobility system, waste and water management:

- Energy use concerns energy for lighting and appliances, cooling, heating, domestic water heating and cooking including details on primary energy sources (e.g. electricity and the electric grid mix, natural gas, gasoil, other fuels). For example, it is important to know the mix of primary sources for electricity generation (this can be at the regional level), the share of renewables, the primary source for heating, Domestic Hot Water (DHW) and cooking in buildings.
- Mobility can be investigated based on the average use of passenger cars per year (travelled km/yr) and the number of cars per household. An alternative solution consists in considering commuting house-work and house-school distance by private car (in average 252 working days/year) or other transport, e.g. public transport, bikes, foot (in this case other private car uses, such as for extra-travelling, can be avoided).
- Waste management concerns the produced quantity of domestic waste (a quantity per capita is usually monitored at the municipal level and can be referred to the unit by considering the average number of people per household) and differentiated rates per treatment plant (waste to landfill, waste to incineration, organic waste to compost, recycling).
- Water use concerns quantity of tap water per capita per day.

The framework for carbon accounting presented in this paper is actually focussed on housing (it does not consider tertiary sectors, industry and agriculture) and will be demonstrated by simulating an average European neighbourhood. Table 1 shows the EFs that were selected for processing the carbon accounting in European cities and the corresponding reference or assessment method.

Compared to the GPC standard mentioned above (GHG Protocol, 2014), the performed GHG inventory applies a “territorial criterion” (IPCC (2006)). Most of the GHG emissions take place within the urban area and refers to the scope 1, being lifecycle processes (e.g. industrial manufacturing of goods such as domestic systems or private cars) left out from the system boundaries. Emissions due to electricity use from the National grid belong the scope 2 and LCA based EFs allowed for assessing the impact of infrastructures, including renewable energy sources (EFs 1–13 in Table 1 take into account lifecycle processes such as installation, maintenance and decommissioning of power plants and electricity grids). Emissions from solid waste and water treatment occur outside the urban area and refer to the scope 3.

The EFs 28–31 for solid waste treatment consider direct emissions due to waste decomposition and incineration, assuming impacts from manufacturing and management of treatment plants as negligible compared to the quantity of treated waste (Marchi et al., 2017a). The EF 32 for tap water is LCA based because it takes into account the relevant energy inputs to sewage treatment plants and water distribution networks (Cheng, 2002) that represent most of the impact associated to water use.

The territorial approach, followed in this study, avoids to pursue a wider responsibility criterion based on the Life Cycle Assessment of goods and materials used; GHG emissions referred to scope 3 are not usually required for reporting in territorial carbon balances, depending on purpose and audience.

Table 2 shows the specific assessment of the electricity emission factor for the EU-28 on the basis of the European electricity grid mix. The activity data related to electricity demand, production and import are obtained by the Eurostat Statistics database (Eurostat, 2015a). Despite this value can be taken by official sources (e.g. Covenant of Mayors, 2016), the direct assessment is shown as part of the framework because EFs for electricity at national and regional level are not always available or coherent and because the share of a simple and clear assessment makes results comparable to each other and the methodology fully replicable. Moreover, the awareness of the electricity grid mix at national or regional level is also important for planning policies locally.

Based on average values in European Union, a typical European household have been profiled (Table 3). In particular, households in EU-28 have an average 2.3 inhabitants per house (Eurostat, 2016). The energy demand concerns almost 16,000 kWh/yr, of which about 4000 kWh/yr electricity for lighting and appliances, cooling/heating and water heating (hereafter DHW - domestic hot water) and cooking; about 12,000 kWh/yr heat by fossil fuels (EEA, 2016; Eurostat, 2015b). The impact of mobility was estimated by considering 1.15 passenger cars/household (Eurostat, 2015c) and average 14,000 km/yr passenger car use (ACEA), 45.7% of which are powered by gasoline, 52.4% by diesel, 1.8% Liquid Petroleum Gas (LPG) (Eurostat, 2015c). This corresponds to the average km travelled in 1 year including urban paths and long travels. Municipal waste production is average 476 kg per capita (Eurostat, 2016), of which 28% landfilled, 27% incinerated, 16% organic composted and 29% recycled. Water use is around 160 L/day per capita (EEA, 2016).

2.2. Equations framework for the carbon mitigation accounting

The carbon emissions of the neighbourhood, assessed based on the procedure shown in the 2.1 section, represent the current state and the challenge to be faced by urban retrofitting. An integrated set of most common CF mitigation measures and policies has been identified as possible initiatives to progressively decrease impacts and finally achieve a condition of carbon neutrality.

The carbon accounting framework aims to ex-ante evaluate potential effects in terms of avoided GHG emissions of different measures for energy saving, energy transition to renewable resources, sustainable mobility, waste management and water resources. The goal of carbon neutrality can be pursued by evaluating alternative scenarios, made according to specific contextual conditions, also including compensation such as carbon uptake by urban ecosystems. The following equations framework in Table 4 shows the assessment method of a set of 25 CF mitigation

Table 1
Emission factors and corresponding reference - assessment method.

Item		EF	Unit	Note
n.	**Electricity grid mix**			
1	electricity (LCA based)	0.375	$kgCO_2$-eq/kWh_e[a]	European electricity grid mix, year 2015 (Table 2)
2	thermoelectricity: natural gas (LCA based)	0.443	$kgCO_2$-eq/kWh_e	Various combined cycle turbines (Sovacool, 2008)
3	thermoelectricity: petroleum (LCA based)	0.778	$kgCO_2$-eq/kWh_e	Various generators and turbine types (Sovacool, 2008)
4	thermoelectricity: coal (LCA based)	1.050	$kgCO_2$-eq/kWh_e	Various generator types (Sovacool, 2008)
5	nuclear (LCA based)	0.066	$kgCO_2$-eq/kWh_e	Various reactor types (Sovacool, 2008)
6	renewable: PV (LCA based)	0.032	$kgCO_2$-eq/kWh_e	Polycrystalline silicone (Sovacool, 2008)
7	renewable: solar thermal (LCA based)	0.013	$kgCO_2$-eq/kWh_e	80 MW – parabolic trough (Sovacool, 2008)
8	renewable: wind (LCA based)	0.010	$kgCO_2$-eq/kWh_e	1.5 MW – onshore (Sovacool, 2008)
9	renewable: hydroelectric (LCA based)	0.012	$kgCO_2$-eq/kWh_e	Reservoir, 3.1 kW, 10 g CO_2-eq/kWh; run-of-river, 300 kW, 13 g CO_2/kWh (Sovacool, 2008)
10	renewable: geothermal (LCA based)	0.380	$kgCO_2$-eq/kWh_e	Ecoinvent 3 (2015)
11	renewable: biomass (LCA based)	0.028	$kgCO_2$-eq/kWh_e	Short rotation forestry steam turbine (Sovacool, 2008)
12	renewable: biogas (LCA based)	0.011	$kgCO_2$-eq/kWh_e	Anaerobic digestion (Sovacool, 2008)
13	renewable: hydrogen (LCA based)	0.664	$kgCO_2$-eq/kWh_e	Fuel cell (Hydrogen from gas reforming (Sovacool, 2008)
Primary energy for heating				
14	natural gas/buthane	0.252	$kgCO_2$-eq/kWh_h[b]	Our assessment: Heat power 9,6 kWh/m^3; 80% efficiency
15	natural gas/buthane	1.933	$kgCO_2$-eq/m^3	IPCC (2006)
16	gasoil/diesel	3.195	$kgCO_2$-eq/kg	IPCC (2006)
17	gasoil/diesel	2.650	$kgCO_2$-eq/L	Our assessment: 0,835 kg/L
18	gasoil/diesel	0.281	$kgCO_2$-eq/kWh_h	Our assessment: Heat power 11,36 kWh/kg
19	LPG[c]	2.984	$kgCO_2$-eq/kg	IPCC (2006)
20	LPG	0.263	$kgCO_2$-eq/kWh_h	Our assessment: Heat power 11,36 kWh/kg
21	biomass, biogas	0.114	$kgCO_2$-eq/kWh_h	Ecoinvent 3 (2015)
Mobility				
22	travelled km by car (petrol)	0.172	$kgCO_2$-eq/km	IPCC (2006)
23	travelled km by car (diesel)	0.169	$kgCO_2$-eq/km	IPCC (2006)
24	travelled km by car (LPG[a])	0.133	$kgCO_2$-eq/km	IPCC (2006)
25	car passenger (diesel)	0.140	$kgCO_2$-eq/(km person)	Our assessment: average 1.2 person/vehicle
26	bus (diesel)	0.337	$kgCO_2$-eq/km	Our assessment: average 8 km/L
27	bus passenger	0.021	$kgCO_2$-eq/(km person)	Our assessment: average 14 person/bus
Urban Waste				
28	waste-to-energy (incineration)	0.652	$kgCO_2$-eq/kg	Includes paper, plastic, textile, nappies, other.
29	waste-to-landfill	1.160	$kgCO_2$-eq/kg	IPCC WASTE MODEL
30	organic waste-to-compost	0.091	$kgCO_2$-eq/kg	waste to composting. EF = 0,05 g CH_4/kg waste and 0,30 g N_2O/kg waste (CH_4: ANPA CTN-ACE, 2002; N_2O: IPCC, 2006)
31	recycled waste	0.000	$kgCO_2$-eq/kg	
Water				
32	water management (LCA beded)	0.585	$kgCO_2$-eq/m^3	extended to the lifecycle of tap water
Carbon uptake by urban ecosystems				
33	grass and herbaceous plants (green roofs and facades)	0.330	$kgCO_2/m^2$	STELLA model, based on IPCC 2006 (Marchi et al., 2015; Marchi et al., 2017b)
34	urban agriculture (vegetable gardens and grains, e.g. wheat)	0.970	$kgCO_2/m^2$	STELLA model, based on IPCC 2006 (Marchi et al., 2015; Marchi et al., 2017b)
35	urban forestry	1.350	$kgCO_2/m^2$	Our assessment based on IPCC 2006 with annual increase and growing stock from the forest inventory (INFC, 2005)
36	fruit trees	0.560	$kgCO_2/m^2$	IPCC (2006)

[a] kWh_e = kWh of electricity produced.
[b] kWh_h = kWh of heat produced.
[c] LPG = Liquid Petroleum Gas.

measures in terms of avoided GHG emissions (namely $CF_{av.}$ in the equations). Potential effects of proposed solutions have been preliminary estimated based on most common parameter values in order to figure out expected ranges of avoided emission (see the "estimated parameter ranges" in the table). Mitigating actions concern different spatial scales of interventions, from the individual behaviour of citizens (namely behavioural in Table 4) to technical solutions (namely systemic/technological) for households, buildings, building blocks, streets and the whole neighbourhood. Moreover, they refer to different time scales of implementation considering short- (about 10 years), medium- (about 20 years) and long-term (about 30 years) scenarios. Short-term actions are those to be immediately launched while long-term refers to solutions that would need infrastructural intervention or deep cultural changes (e.g. transition to electric mobility).

The first set of actions refers to energy savings in residential buildings.

Equation (1) concerns avoided CF due to cooling energy saving in buildings (i.e. electricity) based on the shading effect of vegetation or sun-screens and passive ventilation. Similarly, Equation (2) refers to, an increase of vegetation, trees and solar reflective surfaces at the street level, thus mitigating the Urban Heat Island Effect (UHIE). Passive systems therefore can be implemented autonomously by citizens (Eq. (1)) in buildings or include interventions of urban greenery and UHIE mitigation driven by local administrations (Eq. (2)).

Equation (3) accounts for the energy saving by building retrofitting through envelope insulation and double glazing; the same equation can also apply to domotic systems that allow for energy saving by smart thermostats automatically or remotely controlled. Equation (4) refers to the replacement of traditional light bulbs with LED lamps. Equation (5) quantifies the effects of energy saving by correct behaviors such as moderating the use of cooling-heating systems or buying more energy efficient appliances. These actions

Table 2
Emission Factor (EF) of electricity, based on the European electricity grid mix (2015) (source of activity data: Eurostat, 2015a).

EU-28 2015	LCA based EF (kg CO_2-eq/kWh)	Activity data (kWh)	%	GHG EMISSION (kg CO_2-eq/yr
ELECTRICITY DEMAND	_	**2.74E+15**	**100.0%**	_
ELECTRICITY PRODUCTION	_	**3.23E+15**	**118.0%**	_
NET INPORT	0.578	**1.43E+13**	**0.5%**	**8.24E+12**
TERMO-ELECTRICITY	_	**1.41E+15**	**51.3%**	**1.13E+15**
natural gas	0.443	5.30E+14	19.3%	2.35E+14
petroleum products[a]	0.778	8.43E+13	3.1%	6.55E+13
solid fossil fuels (mainly coal)	1.050	7.91E+14	28.9%	8.31E+14
RENEWABLES	_	**9.71E+14**	**35.4%**	**2.10E+13**
solar thermal	0.013	5.59E+12	0.2%	7.27E+10
solar photovoltaic panel (PV)	0.032	1.02E+14	3.7%	3.27E+12
wind	0.010	3.02E+14	11.0%	3.02E+12
hydroelectric	0.012	3.71E+14	13.5%	4.45E+12
geothermal	0.380	6.52E+12	0.2%	2.48E+12
biomass[b]	0.028	1.17E+14	4.3%	3.27E+12
biogas	0.011	6.09E+13	2.2%	6.70E+11
hydrogen	0.664	5.67E+12	0.2%	3.77E+12
NUCLEAR	_	**8.57E+14**	**31.3%**	**5.66E+13**
nuclear	0.066	8.57E+14	31.3%	5.66E+13
TOTAL	**0.375**	**3.25E+15**		**1.22E+15**

Bold refers to main values in the assessment, differentiated from subclasses.
[a] Petroleum products contain crude oil, petroleum products and waste (non-renewable).
[b] Biomass contains Solid biofuels excluding charcoal, municipal waste (renewable) and liquid biofuels.

Table 3
European household consumptions (source of activity data: Eurostat, 2015a,b, c, 2016; EEA, 2016).

Human activity	Unit	EU-28 HOUSEHOLD Activity data	Percentage
ENERGY	**kWh_e[b]/yr**	**15,704**	
Electricity	**kWh_e/yr**	**3969**	100%
lighting, appliances	kWh_e/yr	2385	60%
cooling	kWh_e/yr	78	2%
cooking	kWh_e/yr	439	11%
heating	kWh_e/yr	612	15%
DHW	kWh_e/yr	439	11%
RES[a] electricity	kWh_e/yr	16	0%
Fuels	**kWh_h[c]/yr**	**11,735**	100%
Natural Gas – heating	kWh_h/yr	4299	37%
Natural Gas – DHW	kWh_h/yr	957	8%
Natural Gas – cooking	kWh_h/yr	282	2%
Petroleum – heating	kWh_h/yr	2024	17%
Petroleum – DHW	kWh_h/yr	282	2%
Petroleum – cooking	kWh_h/yr	110	1%
RES[a] – heating	kWh_h/yr	3232	28%
RES – DHW	kWh_h/yr	502	4%
RES – cooking	kWh_h/yr	47	0%
MOBILITY	**km/yr**	**16,100**	**100%**
passenger car – petrol	km/yr	7406	46%
passenger car – diesel	km/yr	8372	52%
passenger car – LPG	km/yr	322	2%
URBAN WASTE	**kg/yr**	**1095**	**100%**
% waste-to-landfill	kg/yr	308	28%
% waste-to-energy	kg/yr	292	27%
% organic	kg/yr	179	16%
% recycling	kg/yr	315	29%
WATER	**m^3/yr**	**134**	**100%**
m^3 per yr (house)	m^3/yr	134	100%

[a] RES = Renewable Energy Sources.
[b] kWh of electricity produced (hereafter kWh_e).
[c] kWh of heat produced (hereafter kWh_h).

concern proactive initiatives of citizens induced by awareness raising campaigns, public subsidies or incentives for energy saving.

The second set of actions refers to energy generation from renewable sources.

The production of electricity from solar photovoltaic (PV) panels (Equation (6)), wind (Equation (7)) and hydro turbines (Equation (8)) determines a GHG emissions mitigation at various scales (i.e. household, building, building block, street and neighbourhood) depending on the plant size (Equations (6)–(8)). PV panels can be installed both on roofs or façades of single buildings (short time implementation scale) and in solar farms, operating in the regional district and envisioned as an outdoor energy industry (longer time scale). Micro-wind towers operate at household-building level, while mini- and big-wind towers or mini-hydro turbines can supply the energy demand of building blocks and neighborhoods.

Equations (9)–(11) concern heat or combined heat-electricity production by the installation of thermo-solar collectors, hybrid photovoltaic-thermal solar panels, heat pumps based on integrated

Table 4
Equations framework for the estimate of avoided GHG emission ($CF_{av.}$ [kg CO_2-eq]) by Carbon Footprint mitigation/compensation measures.

Equations		Symbols	Estimated parameter ranges	Type of action
SET OF ACTIONS: ENERGY SAVING IN BUILDINGS				
Eq. (1)	*Shading and passive ventilation* : $CF_{av.} = (n \times E_c \times e_c) \times EF_{kWh_e}$	n = number of households [n]; E_c = cooling energy demand per household [kWh_e/yr]; e_c = rate of cooling energy saving due to shading and passive ventilation [%]; EF_{kWh_e} = EF electricity [kg CO_2-eq/kWh_e] (Table 2).	n = 1 household; Ec = 78 kWh_e/yr (Table 3); e_c = from 10% to 50% (ref. Agrawal et al., 2012). Estimated CF_{av}: 2.93−14.63 kg CO_2-eq/house	Spatial scale: household, building. Temporal scale: short term. Type of solution: systemic/technological; behavioral.
Eq. (2)	*UHIE mitigation by vegetation* : $CF_{av.} = (n \times E_c \times e_c) \times EF_{kWh_e}$	n = number of households [n]; E_c = cooling energy demand per household [kWh_e/yr]; e_c = rate of cooling energy saving due to UHIE mitigation by vegetation [%]; EF_{kWh_e} = EF electricity [kg CO_2-eq/kWh_e] (Table 2).	n = 1 household; Ec = 78 kWh_e/yr (Table 3); e_c = from 5% to 20% (ref. Akbari et al., 2001). Estimated CF_{av}: 1.46−5.85 kg CO_2-eq/house	Spatial scale: street, neighborhood. Temporal scale: short term. Type of solution: systemic/technological.
Eq. (3)	*Building envelope retrofitting and domotic systems* : $CF_{av.} = [(n \times E_c \times e_c) \times EF_{kWh_e}] + [(n \times H_h \times e_h) \times EF_{kWh_h}]$	n = number of households [n]; E_c = cooling energy demand per household [kWh_e/yr]; e_c = rate of cooling energy saving [%]; EF_{kWh_e} = EF electricity [kg CO_2-eq/kWh_e] (Table 2); H_h = heat demand for heating per household [kWh_h/yr]; e_h = rate of heating energy saving [%]; EF_{kWh_h} = EF natural gas for heating [kg CO_2-eq/kWh_h] (Table 1, Item 14).	n = 1 household; Ec = 78 kWh_e/yr (Table 3); H_h = 6323 kWh_h/yr (Table 3, excluded RES). *Building envelope retrofitting:* e_c = from 20% in warm to 80% in cold climate, mainly depending on proper ventilation and threshold values (ref. Qian and Lee, 2014); e_h = from 30% to 60% (ref. Qian and Lee, 2014). *Domotic systems:* e_c and e_h = around 10% (ref. NV energy, 2018; Smart Home, 2017). Estimated CF_{av}: *Building envelope retrofitting* → 483.87 −979.44 kg CO_2-eq/house *Domotic systems* → 162.26 kg CO_2-eq/house	Spatial scale: household, building. Temporal scale: short term. Type of solution: systemic/technological.
Eq. (4)	*Led lamps* : $CF_{av.} = [n \times I \times (P_0 - P_n) \times t] \times EF_{kWh_e}$	n = number of households [n]; I = number of light bulbs per household [n]; P_0 = power of traditional light bulbs [kW]; P_n = power of LED lights [kW]; t = operating time [h/yr]; EF_{kWh_e} = EF electricity [kg CO_2-eq/kWh_e] (Table 2).	n = 1 household; I = estimate 10 light bulbs per household; P_0 = 80 W; P_n = 8 W (90% less) (ref. Frank et al., 2015; King and Perry, 2017); t = 438 h/yr (average 4 hors/day x 3% of 10 lamps × 365 days. Estimated CF_{av}: 118 kg CO_2-eq/house	Spatial scale: household, building. Temporal scale: short term. Type of solution: systemic/technological.
Eq. (5)	*People behavioural change* : $CF_{av.} = [(n \times E_d \times e) \times EF_{kWh_e}] + [(n \times H_d \times h) \times EF_{kWh_h}]$	n = number of households [n]; E_d = electricity demand per household [kWh_e/yr]; e = rate of electricity saving by behavioural change [%]; EF_{kWh_e} = EF electricity [kg CO_2-eq/kWh_e] (Table 2); H_d = heat demand for cooking, heating and domestic hot water per household [kWh_h/yr]; h = rate of heating energy saving by behavioural change [%];	n = 1 household; E_d = 3953 kWh_e/yr (Table 3, excluded RES); H_d = 7954 kWh_h/yr (Table 3, excluded RES); e and h = from 5% to 10% (ref. Darby, 2006). Estimated CF_{av}: 174.34−348.68 kg CO_2-eq/house	Spatial scale: household, building. Temporal scale: short term. Type of solution: behavioral.

(*continued on next page*)

Table 4 (*continued*)

Equations	Symbols	Estimated parameter ranges	Type of action
	EF_{kWh_h} = EF natural gas for heating [kg CO_2-eq/kWh_h] (Table 1, Item 14).		
SET OF ACTIONS: ENERGY GENERATION FROM RENEWABLE SOURCES			
Eq. (6) *PV panels* : $CF_{av.} = (S \times P \times Y \times a) \times EF_{kWh_e}$	S = surface of roofs or walls covered by PV panels [m^2/household]; P = installed power [kW/m^2]; Y = production yield [kWh_e/kW]; a = exposition plan coefficient; EF_{kWh_e} = EF electricity [kg CO_2-eq/kWh_e] (Table 2).	S = 12 m^2/household or estimate 1000 m^2 in sun farms; P = 0.12–0.25 kW/m^2; Y = from 2.5 MWh_e/yr in N-EU (Belfast - IE), to 3.2 in C-EU (Paris - FR), until 3.9 (Rome - IT) and 4.8 MWh_e/yr (Palermo - IT) in S-EU (ref. EU JRC, 2018); a = 1 (slope <70°, as in the case of roofs) or 0.7 (slope >70°, as in the case of walls). Estimated CF_{av}: *On roofs or walls* → 843.75–1102.50 kg CO_2-eq/house. *In sun farms* → 70,312.50–91,873 kg CO_2-eq.	Spatial scale: *On roofs or walls* → household, building. *In sun farms* → neighborhood. Temporal scale: *On roofs or walls* → short term. *In sun farms* → medium term. Type of solution: systemic/technological.
Eq. (7) *Wind turbine* : $CF_{av.} = (n_{wt} \times P \times v \times t) \times EF_{kWh_e}$	n_{wt} = number of installed wind towers [n]; P = standard power [kW]; v = capacity factor due to wind speed variability; t = operating time [h/yr]; EF_{kWh_e} = EF electricity [kg CO_2-eq/kWh_e] (Table 2).	n = 1 micro wind tower, 1 mini or big wind tower; P = 1–5 kW for micro-wind towers (6–9 m towers embedding 1–7 m turbines), 20–200 kW for mini-wind towers (10–30 m towers embedding 1–20 m towers), 1–3 MW for big-wing towers (60–120 m towers embedding 55–80 m turbines) (ref. OE, 2018); v = from 0.8 to 0.85 (ref. SEI, 2018); t = 3285 h/yr (i.e. 365 day/yr × 10 h/day × 90% day/yr due to maintenance). Estimated CF_{av}: *Micro wind tower* → 1256.51–6282.56 kg CO_2-eq/wind tower; *Mini wind tower* → 25,130.25–251,302.50 kg CO_2-eq/wind tower; *Big wind tower* → 1,047,093.75–3,141,281.25 kg CO_2-eq/wind tower.	Spatial scale: *Micro wind tower* → household, building. *Mini wind tower* → building block, street. *Big wind tower* → neighborhood. Temporal scale: *Micro-Mini wind tower* → short term. *Big wind tower* → medium term. Type of solution: systemic/technological.
Eq. (8) *Mini hydro plant* : $CF_{av.} = (n_{ht} \times P \times w \times t) \times EF_{kWh_e}$	n_{ht} = number of installed hydro turbines; P = standard power [kW]; w = capacity factor due to water load variability; t = operating time [h/yr]; EF_{kWh_e} = EF electricity [kg CO_2-eq/kWh_e] (Table 2).	n = 1 hydro turbine; P = from 100 kW to 1 MW (ref. LifeGate, 2018); w = 0.85 (ref. LifeGate, 2018); t = from 3000 to 5000 h/yr. Standard 100 kW hydro-turbine can provide up to 350 MWh/yr. Estimated CF_{av}: 65,625 – 1,593,750 kg CO_2-eq	Spatial scale: building block, street, neighborhood. Temporal scale: short -medium term. Type of solution: systemic/technological.
Eq. (9) *Thermo_solar collector* : $CF_{av.} = (n_{PV} \times S \times Y_h) \times EF_{kWh_h}$	n_{PV} = number of installed solar collectors [n]; S = exposed surface [m^2]; Y_h = heat production yield [kWh_h/m^2]; EF_{kWh_h} = EF natural gas for heating [kg CO_2-eq/kWh_h] (Table 1, Item 14).	n = 1 household; S = 2 m^2 per household (ref. Tian and Zhao, 2013; University of Strathclyde, 2018); Y_h = from 2.9 kWh_h/day in N-EU to 6.3 kWh_h/day in S-EU and from 1000 kWh_h/(m^2 yr) in N-EU to 2200 kWh_h/	Spatial scale: household, building. Temporal scale: short term. Type of solution: systemic/technological.

			(m^2 yr) in S-EU (ref. University of Strathclyde, 2018). Estimated CF_{av}: 504 − 1108.80 kg CO_2-eq/house.	
Eq. (10)	*PV thermo hybrid panel* : $CF_{av.} = [(n_{PVt} \times S \times Y_e) \times EF_{kWh_e}] + [(n \times S \times Y_h) \times EF_{kWh_h}]$	n_{PVt} = number of PV-thermo hybrid solar panels; S = exposed surface [m^2]; Y_e = electricity production yield [kWh_e/m^2]; EF_{kWh_e} = EF electricity [kg CO_2-eq/kWh_e] (Table 2); Y_h = heat production yield [kWh_h/m^2]; EF_{kWh_h} = EF natural gas for heating [kg CO_2-eq/kWh_h] (Table 1, Item 14).	$n = 1$ household; $S = 2\ m^2$ per household (ref. Tian and Zhao, 2013; University of Strathclyde, 2018); Y_e = from 1000 kWh_e/m^2 in N-EU to 2200 kWh_e/m^2 in S-EU (ref. Bosanac et al., 2003); Y_h = from 1000 kWh_h/m^2 in N-EU to 2200 kWh_h/m^2 in S-EU (ref. Bosanac et al., 2003; Baig et al., 2013). Estimated CF_{av}: 1254 − 1758.80 kg CO_2-eq/house.	Spatial scale: household, building. Temporal scale: short term. Type of solution: systemic/technological.
Eq. (11)	*Renewable source based heat pumps* : $CF_{av.} = [(n \times H_{hw} \times y) \times EF_{kWh_h}] - (E_{hp} - PV_e)$	n = number of households [n]; H_{hw} = heat demand for heating and hot water per household [kWh_h/yr]; y = rate of heat energy saving [%]; EF_{kWh_h} = EF natural gas for heating [kg CO_2-eq/kWh_h] (Table 1, Item 14); E_{hp} = electricity demand to supply the heat pump [kWh_e/yr]; PV_e = electricity supply by integrated PV [kWh_e/yr].	$n = 1$ household; $H_{hw} = 7562\ kWh_h$/yr (Table 3, excluded RES and heat for cooking); $y = 4\%$; e.g. 2500 kWh_e/yr to supply about 10,000 kWh_h/yr (ref. Self et al., 2013). Geothermal heat pumps can exploit horizontal heat exchangers (around 120% of household surface, until 60 cm depth) or vertical systems (around 110 m depth) (ref. Energy Expert, 2011); $E_{hp} = 0\ kWh_e$ (assumed totally supported by PV panels) $PV_e = 3025\ kWh_e$. Estimated CF_{av}: 1905.62 kg CO_2-eq/house.	Spatial scale: household, building. Temporal scale: short term. Type of solution: systemic/technological.
Eq. (12)	*Biomass to energy cogeneration* : $CF_{av.} = [(B \times HP_b \times y \times b) \times EF_{kWh_h}] + [(B \times Y_e \times e) \times EF_{kWh_e}]$	B = quantity of biomass [t]; HP_b = heat power of biomass [kWh_h/t]; y = heat production yield [%]; b = heat self-consumption rate [%]; EF_{kWh_h} = EF natural gas for heating [kg CO_2-eq/kWh_h] (Table 1, Item 14); Y_e = electricity production yield [kWh_e/t]; e = electricity self-consumption rate [%]; EF_{kWh_e} = EF electricity [kg CO_2-eq/kWh_e] (Table 2).	$B = 1$ t biomass $HP_b = 2500\ kWh_h$/1 t wood chips; y = from 30% (bio-residues) to 90% (wood chips) (ref. EAL, 2011); b = average 80% of produced heat; $Y_e = 1000\ kWh_e$/1 t wood chips; e = average 75% of produced electricity (ref. EAL, 2011). Estimated CF_{av}: 469.95−772.35 kg CO_2-eq/t biomass.	Spatial scale: neighborhood. Temporal scale: Medium term. Type of solution: systemic/technological.
Eq. (13)	*Distric heating Network* (*integrated renewable sources*) : $CF_{av.} = [(n \times H_h \times h) + (n \times H_w \times w)] \times EF_{kWh_h}$	n = number of households [n]; H_h = heat demand for heating per household [kWh_h/yr]; h = rate of heat energy saving [%]; H_w = water heating demand per household [kWh_h/yr]; w = rate of water heating energy saving [%]; EF_{kWh_h} = EF natural gas for heating [kg CO_2-eq/kWh_h] (Table 1, Item 14).	$n = 1$ household; $H_h = 6323\ kWh_h$/yr (Table 3, excluded RES); $h = 90\%$ (ref. Ancona et al., 2015); $H_w = 1239\ kWh_h$/yr (Table 3, excluded RES); $w = 80\%$ (ref. Ancona et al., 2015). Estimated CF_{av}: 1683.84 kg CO_2-eq/house.	Spatial scale: neighborhood. Temporal scale: Medium-long term. Type of solution: systemic/technological.
Eq. (14)	*Mini grid* (*integrated renewable sources*) : $CF_{av.} = (n \times E_d) \times EF_{kWh_e}$	n = number of households [n]; E_d = electricity demand per household [kWh_e/yr]; EF_{kWh_e} = EF electricity [kg CO_2-eq/kWh_e] (Table 2).	$n = 1$ household; $E_d = 3953\ kWh_e$/yr (Table 3, excluded RES); Electricity mini grids is supplied by a combination of renewable energy generation plants (ref. Ancona et al., 2015).	Spatial scale: neighborhood. Temporal scale: Medium-long term. Type of change: systemic/technological.

(*continued on next page*)

Table 4 (*continued*)

Equations	Symbols	Estimated parameter ranges	Type of action
Eq. (15) *Transition to electric systems* : $CF_{av.} = [(n \times H_d \times e) \times EF_{kWh_h}] - [(n \times E_d \times i) \times EF_{kWh_e}]$	n = number of households [n]; H_d = heat demand for cooking, heating and domestic hot water per household [kWh_h/yr]; e = rate of energy saving [%]; EF_{kWh_h} = EF natural gas for heating [kg CO_2-eq/kWh_h] (Table 1, Item 14); E_d = electricity demand per household [kWh_e/yr]; i = increase of electricity demand [%]; EF_{kWh_e} = EF electricity [kg CO_2-eq/kWh_e] (Table 2).	Estimated CF_{av}: 1482.36 kg CO_2-eq/house. n = 1 household; H_d = 7954 kWh_h/yr (Table 3, excluded RES); e = 100% E_d = 3953 kWh_e/yr (Table 3, excluded RES); i = 180% (for heating and domestic hot water) and 50% (for cooking): overall 230% (ref. Nordic heating, 2015). Estimated CF_{av}: 1405.05 kg CO_2-eq/house.	Spatial scale: household, building, neighborhood. Temporal scale: long term. Type of solution: systemic/technological, behavioral.
SET OF ACTIONS: SUSTAINABLE MOBILITY			
Eq. (16) *Biofuel production* : $CF_{av.} = (B_h \times Y_{eth} \times HP_{eth} \times D) \times EF_{km_{diesel}}$	B_h = harvested biomass [t]; Y_{eth} = ethanol production yield [L/t]; HP_{eth} = bioethanol heat power [kWh_h/L]; D = travelled km by private car per fuel unit [km/kWh_h]; $EF_{km_{diesel}}$ = EF travelled km by private car [kg CO_2-eq/km] (Table 1, e.g. Item 23).	B = 1 t biomass; Y_{eth} = average from 1.4 L/t to 10 L/t for grain and maize (ref. Ghisolfi, 2008); HP_{eth} = 7520 kWh_h/L D = average 2 km/kWh_h (Cheung et al., 2015); Bio-ethanol production yield in t/ha is: 22 t/ha for reed, 10 t/ha for sorghum, 1.4 t/ha for rapeseed, 1.63 t/ha for grain and 3.3 t/ha for maize (ref. Ghisolfi, 2008). Estimated CF_{av}: 3558.46–25,417.60 kg CO_2-eq/t biomass.	Spatial scale: neighborhood. Temporal scale: medium term. Type of solution: systemic/technological.
Eq. (17) *Remote work & bike/walk to school, work* : $CF_{av.} = \left(n_p \times \frac{u}{p} \times d \times t \times a\right) \times EF_{km_{diesel}}$	n_p = number of persons reached by specific measures (e.g. free Wi-Fi neighborhood, protected pathway to walk or ride around a school or working place, bike sharing system) [n]; u = percentage of persons engaged that really change their behavior [%]; p = average number of persons per vehicle [n]; d = return commuting distance in working days [km/day]; t = number of working days per yr [days/yr]; a = rate of abandon of private car (e.g. working days walking or riding instead of driving) [%]; $EF_{km_{diesel}}$ = EF travelled km by private car [kg CO_2-eq/km] (Table 1, e.g. Item 23).	n_p = 1 person reached by specific measures; u = 10% (ref. Shaheen and Lipman, 2007); p = 1.15 person (Eurostat, 2015c); d = 10 km; t = 252 working days/yr; a = 80% working day walk & bike instead of driving (ref. Poundex, 2008). Estimated CF_{av}: 28.39 kg CO_2-eq/person	Spatial scale: neighborhood. Temporal scale: short term. Type of solution: systemic/technological; behavioral.
Eq. (18) *Car pooling* : $CF_{av.} = (n_p \times d \times t \times a) \times EF_{km\ passenger}$	n_p = number of persons engaged besides drivers [n]; d = average return commuting distance by car [km/day]; t = number of working days per yr [days/yr]; a = rate of abandon of private car (e.g.	n_p = 1 of engaged person; d = 40 km (ref. Manzini and Pareschi, 2012); t = 252 working days/yr; a = 80% working day car-pooling instead of driving (ref. Manzini and Pareschi, 2012).	Spatial scale: neighborhood. Temporal scale: short term. Type of solution: systemic/technological; behavioral.

		working days choosing car-pooling instead of driving) [%]; $EF_{km\ passenger}$ = EF passenger by diesel car [kg CO_2-eq/(km person)] (Table 1, Item 25).	Estimated CF_{av}: 1428.96 kg CO_2-eq/person	
Eq. (19)	*Public transport* : $CF_{av.} = (n_p \times d \times t \times a \times p) \times (EF_{km\ passenger} - EF_{km\ bus\ passenger})$	n_p = number of engaged persons [n]; d = return commuting distance in working days [km/day]; t = number of working days per yr [days/yr]; a = rate of abandon of private car (e.g. working days taking public transport instead of driving) [%]; p = rate of new passengers that avoid car use [%]; $EF_{km\ passenger_{diesel}}$ = EF passenger by diesel car [kg CO_2-eq/(km person)] (Table 1, Item 25); $EF_{km\ bus\ passenger}$ = EF passenger by bus [kg CO_2-eq/(km person)] (Table 1, Item 27).	$n_p = 1$ engaged person; $d = 50$ km/day; $t = 252$ working days/yr; $a = 80\%$ working day public transport instead of driving (ref. Yan and Crookes, 2009); $p = 80\%$ avoided use of private car (ref. Yan and Crookes, 2009). Estimated CF_{av}: 959.62 kg CO_2-eq/person	Spatial scale: neighborhood. Temporal scale: Short-medium term. Type of solution: systemic/technological; behavioral.
Eq. (20)	*Transition to electric mobility* : $CF_{av.} = [(n_v \times d) \times EF_{km}] - [(n_v \times d \times E_v) \times EF_{kWh_e}]$	n_v = number of replaced vehicles; d = total travelled distance by car per year [km/yr]; EF_{km} = EF travelled km by private car (diesel as average) [kg CO_2-eq/km] (Table 1, Item 23); E_v = electricity demand per km travelled by electric vehicles [kWh_e/km]; EF_{kWh_e} = EF electricity [kg CO_2-eq/kWh_e] (Table 2).	$n_v = 1$ replaced vehicles; $d = 14{,}000$ km/yr (ref. Eurostat, 2015c); $E_v = 16$ kWh_e/100 km (ref. GAA, 2015). Estimated CF_{av}: 1526 kg CO_2-eq/vehicle	Spatial scale: neighborhood. Temporal scale: long term. Type of solution: systemic/technological; behavioral.
SET OF ACTIONS: WASTE MANAGEMENT				
Eq. (21)	*Waste reduction & increased recycling* : $CF_{av.} = \{[(n \times W \times w_l) \times r \times EF_l] + [(n \times W \times w_i) \times r \times EF_i] + [(n \times W \times w_o) \times r \times EF_o]\} - [(n \times W) \times r_r \times EF_r]$	n = number of households [n]; W = collected waste per household [t/yr]; w_l = current waste fraction disposed to landfill [%]; w_i = current waste fraction to incineration [%]; w_o = current waste fraction to composting plants [%]; r = rate of waste reduction [%]; r_r = rate of increased waste recycling [%]; EF_l = EF waste treated in landfill [kg CO_2-eq/kg] (Table 1, Item 29); EF_i = EF waste treated in incinerators [kg CO_2-eq/kg] (Table 1, Item 28); EF_o = EF organic waste treated in composting plants [kg CO_2-eq/kg] (Table 1, Item 30); EF_r = EF of recycling waste [kg CO_2-eq/kg] (assumed = 0, Table 1, Item 31).	$n = 1$ household; $W = 1095$ kg/yr: 406 kg waste/person; 2.7 person/household (Table 3); $w_l = 28\%$ (Table 3); $w_i = 27\%$ (Table 3); $w_o = 16\%$ (Table 3); r = −10% reduction (ref. Marchi et al., 2017a, 2018) r_r = +20% increase (i.e.49% *vs* 29% in Table 3) (ref. Marchi et al., 2017a, 2018); Estimated CF_{av}: 98 kg CO_2-eq/house	Spatial scale: neighborhood. Temporal scale: short term. Type of solution: systematic/technological; behavioral.
Eq. (22)	*Dicrease of lanfilled waste fraction* : $CF_{av.} = [(n \times W \times w_l) \times l \times EF_l] - \{[(n \times W \times w_i) \times i \times EF_i] + [(n \times W \times w_o) \times o \times EF_o] + [(n \times W \times w_r) \times r \times EF_r]\}$	n = number of households [n]; W = collected waste per household [kg/yr]; w_l = current waste fraction disposed to landfill [%]; w_i = current waste fraction to incineration [%];	$n = 1$ household; $W = 1095$ kg/yr: 476 kg waste/person; 2.3 person/household (Table 3); $w_l = 28\%$ (Table 3); $w_i = 27\%$ (Table 3); $w_o = 16\%$ (Table 3);	Spatial scale: neighborhood. Temporal scale: short term. Type of solution: systematic/technological; behavioral.

(*continued on next page*)

Table 4 (*continued*)

Equations		Symbols	Estimated parameter ranges	Type of action
		w_o = current waste fraction to composting plants [%]; w_r = current recycled waste fraction [%]; l = reduction of landfilled waste fraction [%]; i = increase of incinerated waste fraction [%]; o = increase of composted waste fraction [%]; r = increase of recycled waste fraction [%]; EF_l = EF waste treated in landfill [kg CO_2-eq/kg] (Table 1, Item 29); EF_i = EF waste treated in incinerators [kg CO_2-eq/kg] (Table 1, Item 28); EF_o = EF organic waste treated in composting plants [kg CO_2-eq/kg] (Table 1, Item 30); EF_r = EF of recycling waste [kg CO_2-eq/kg] (assumed = 0, Table 1, Item 31).	w_r = 29% (Table 3); l = −10% reduction (i.e. 18% *vs* 28% in Table 3) (ref. Marchi et al., 2017a, 2018); i = +10% increase (i.e. 37% *vs* 27% in Table 3) (ref. Marchi et al., 2017a, 2018); o = +10% increase (i.e. 26% *vs* 16% in Table 3) (ref. Marchi et al., 2017a, 2018); r = +10% increase (i.e. 39% *vs* 29% in Table 3) (ref. Marchi et al., 2017a, 2018). Estimated CF_{av}: 11 kg CO_2-eq/house	
Eq. (23)	*Waste to energy* : $CF_{av.} = \{[(n \times W \times w_i) \times HP_w \times y \times EF_{kWh_h}] + [(n \times W \times w_i) \times Y_e \times EF_{kWh_e}]\} - [(n \times W \times w_i) \times EF_i]$	n = number of households [n]; W = collected waste per household [t/yr]; w_i = current waste fraction to incineration [%]; HP_w = heat power of waste [kWh_h/t]; y = heat production yield [%]; EF_{kWh_h} = EF natural gas for heating [kg CO_2-eq/kWh_h] (Table 1, Item 14); Y_e = electricity production yield [kWh_e/t]; EF_{kWh_e} = EF electricity [kg CO_2-eq/kWh_e] (Table 2); EF_i = EF waste treated in incinerators [kg CO_2-eq/kg] (Table 1, Item 28).	n = 1 household; W = 1095 kg/yr: 476 kg waste/person; 2.3 person/household (Table 3); w_i = 27% (Table 3) HP_w = 600 kWh_h/t of waste (ref. Siena Ambiente, 2015); y = 70%; Y_e = 500 kWh_e/t of waste (ref. Siena Ambiente, 2015). A plant that burn in average 70,000 t of waste/yr produces 35,00 MWh_e and 42,000 MWh_h. Estimated CF_{av}: 67,450 kg CO_2-eq/house	Spatial scale: neighborhood. Temporal scale: Medium term Type of solution: systemic/technological.
SET OF ACTIONS: WATER RESOURCE MANAGEMENT & CARBON UPTAKE BY URBAN ECOSYSTEMS				
Eq. (24)	*Water use reduction & rainwater harvesting* : $CF_{av.} = n \times w \times r \times EF_w$	n = number of households [n]; w = water use per household [m^3/yr]; r = tap water saving rate [%]; EF_w = EF tap water use [kg CO_2-eq/m^3] (Table 1, Item 32).	n = 1 household; w = 134 m^3/yr (Table 3); r = 40% (ref. Deng et al., 2016). Estimated CF_{av}: 31.36 kg CO_2-eq/house	Spatial scale: neighborhood. Temporal scale: Short term. Type of solution: systematic/technological; behavioral.
Eq. (25)	*Green areas* : $CO_2 uptake = GS \times EF_E$	GS = Green space surfaces [m^2]; EF_E = Emission removals by ecosystems relative to different plant species (e.g. grass, herbaceous plants, vegetable gardens, urban forestry, fruit trees) [kg CO^2/m^2] (Table 1, Item 33–36).	GS = 1 m^2; EF_E = grass and herbaceous plants in roofs, facades, lawns-flowerbeds-vegetable gardens (in average 0.65 kg CO_2/m^2), fruit trees (0.56 kg CO_2/m^2) and urban forestry (1.35 kg CO_2/m^2). Estimated CF_{av}: Table 1, Item 33-36	Spatial scale: neighborhood. Temporal scale: medium term. Type of solution: systemic/technological.

renewable sources (such as geothermal as heat source and PV panels for electricity supply).

Equation (12) concerns the use of biomass for heat and power cogeneration. The biomass to energy cogeneration requires a specific plant and a biomass harvesting system, including a specific fraction of residues from agriculture and forestry. This system would potentially supply heat energy to District Heating Networks (DHN) and electricity to local or even national grids. In particular, Equations (13)–(14) estimate the CF mitigation due to DHN and electricity mini grids at the neighborhood scale. DHN can be high temperature grids supplied by a combination of heat sources such as biomass-to-energy plants, waste incineration, energy cascading from industrial processes, or low temperature grids supplied by thermo-solar collectors, geothermal based heat pumps, heat storages. The mini smart grid, fed by a combination of renewable energy generation plants at neighborhood level, including for example private or shared solar and wind-farms located in specific sites, is able to balance the inconstant electricity generation from renewable sources and the withdrawal by users through storage systems. As assumption for the CF mitigation accounting, DHN and smart grids are supposed to fully or partially support the energy demand (i.e. space/water heating and electricity, respectively) of an assigned number of households.

Equation (15) concerns the full transition to electric systems for space and water heating and cooking. It foresees an increase of electricity demand for heating systems (both space and water), besides cooking, assuming an average Coefficient of Performance of heat pumps (CoP = 4; Nordic heating, 2015). As a general result, net emissions are highly decreased by replaced fossil fuels despite the increased impact of electricity. The latter can be avoided by generation through renewable sources.

The third set of actions refers to sustainable mobility.

Equation (16) concerns biofuel production from biomass, mainly residues of the cultivated area. Bioethanol production for example is an option to develop urban agriculture in marginal areas and brownfields for energy purpose.

Equations (17)–(19) evaluate the energy saving due to remote working, walk to school-work (e.g. protected pathways), ride to school-work (e.g. protected cycling roads) and bike sharing, as well as car-pooling and the increased use of public transport (induced by the optimization of services or specific campaigns and incentives). These measures concern reduced impact of mobility based on improved infrastructures and induced behavioral changes of citizens.

Equation (20) foresees the transition to electric mobility. The benefit due to the decrease of fossil fuels use takes into account the increased consumption of electricity for vehicles, considering an additional electricity demand (average 16 kWh_e per 100 km; ref. GAA, 2015).

The fourth set of actions refers to waste management. Equation (21) concerns a decrease of domestic waste production by dwellings and an increase of recycling rates. Emission reduction due to the increase of domestic waste recycling can be similarly assessed by considering the climate impact of recycling processes. These can be assumed as zero in order to enhance the effect of good practices of differentiation and recycling. Equation (22) concerns a decrease of the landfilled waste fraction and the increase of differentiated rates sent to incineration (waste to energy), composting (organic waste) and recycling. Equation (23) concerns the production of electricity and heat from waste incineration. The decrease of undifferentiated waste fraction conferred to landfill, the increase of incinerated waste and collected organic fraction provide lower impact of waste management, depending on more efficient infrastructures, services and behavioral changes of citizens.

The fifth set of actions refers to water resource management and carbon uptake by urban ecosystems. Equation 24 concerns an improved water management system. The effect of this measure concerns tap water saving by decreasing domestic consumption (behavioral attitude) or by installing water harvesting systems from roofs for gardening and other not drinkable uses.

Equation (25) determines the CO_2 removals from the atmosphere by absorption in plant biomass. The CO_2 uptake in the vegetation depends on the extension of green surfaces and the specific absorption capacity of different plant types in urban areas.

2.3. GHG emissions reduction scenario

For demonstration, an energy transition and CF mitigation scenario has been hypothesized referring to the average European (EU-28) neighbourhood (hypothetically 10,000 households, hosting 23,000 inhabitants). Scope of the scenario is to show one possible pathway, among others, to achieve a condition of carbon neutrality in the long run throughout a determined sequence of policies and measures among those shown in Table 4. Table 5 makes explicit the parameters used for estimating the effects of each measure including number of involved households and rates of energy saving, mobility shift, waste fraction and water use. The measures, analysed in the CF mitigation scenario, are listed from 01 to 15 in Table 5.

The selected measures show a comprehensive strategy to implement action plans based on most common activities, starting first from solutions applicable in the short-term and then promoting initiatives with long-term horizon. In particular, the decarbonisation scenario has been structured into four steps:

a) Energy saving; waste reduction and water use decrease: combination of solutions to avoid energy waste and reduce resource use. Most common policies concern: energy performance in buildings through passive systems (01), improved insulation (02), higher efficiency of lighting (03); sustainable mobility by walk and bike (04) and by public transportation (05); optimized waste management by waste differentiation and recycling (06) and increased rate of incineration in waste-to-energy plants (07); water use reduction (08). These policies imply awareness raising campaigns or incentives/disincentives to induce behavioral changes of citizens as well as structural investments for the innovation of organization and processes.
b) Local exploitation of renewable energy sources: combination of solutions to generate energy from renewable sources including heat and electricity. The simulated policies include: installation of biomass-to-energy cogeneration plant (09) to supply an integrated DHN (10); electricity generation by PV on flat roofs (11) and wind turbines (12). Since measures 11 and 12 can concern different spatial scales (from the household to the neighborhood), the size of solar and wind systems have been hypothesized to supply the residual electricity demand of the neighborhood, including the additional demand due to the foreseen transition to fully electrical systems (following step c). They can be progressively installed during a reasonable time interval, first for the energy retrofitting of the neighborhood (short run) and then for its transition to electric systems (long run).
c) Transition to electrical systems for replacement of residual fuels: as a desirable vision of future city neighborhoods, the simulated policies forecast a transition to electrical systems in buildings, including space and water heating and cooking (13), and for mobility through the replacement of machines powered by fuels with electric cars, bikes and public transport (14). The additional demand of electricity can be

Table 5
Parameters used for the assessment of the selected CF mitigation measures.

n.	CF mitigation measure	Symbol	Value	Description	Eq. n. (Table 4)
a) Saving electricity, fuels, waste and water					
01	Building shading and UHIE mitigation	n	6000	Involved households	1–2
		e	−10%	Rate of cooling energy saving	
02	Building envelope retrofitting	n	4000	Involved households	3
		e_c	−80%	Rate of cooling energy saving	
		e_h	−60%	Rate of hating energy saving	
03	LED lamps	n	4500	Involved households	4
		l x (P_0-P_n) x t	318 kWh/house	Lighting energy saving	
04	Bike/walk to school-work	n	1500	Involved households	17
		$u/p \times d \times t \times a$	16100 km/house	Avoided distance travelled by car	
05	Public transport	n	4000	Involved households	19
		$d \times t \times a \times p$	16100 km/house	Avoided distance travelled by car	
06	Waste reduction and increased recycling	n	10,000	Involved households	21
		r	−10%	Reduced (landfilled) waste production	
07	Lower landfilled and incinerated waste	n	10,000	Involved households	22
		l	−60%	Reduction of landfilled waste	
		i	−30%	Reduction of incinerated waste	
		o	30%	Increase of composted waste	
		r	70%	Increase of recycled waste	
08	Water use reduction	n	10,000	Involved households	24
		r	−40%	Tap water saving rate	
b) Installation of varies renewable energy sources					
09	Biomass to energy cogeneration	B x HP_b x y x b	10,000 MWh	Heat production (i.e. 1000 equivalent houses)	12
		B x Y_e x e	4500 MWh	Electricity production (i.e. 1100 equivalent houses)	
10	District Heating Network	n	1800	Involved households	13
		h	−90%	Rate of heat energy saving	
		w	−80%	Rate of water heating energy saving	
11	PV on roofs	S x P x Y x a	30,000 MWh	Renewable energy production (i.e. 7500 equivalent households)	6
12	Wind turbines	$n_{wt} \times P \times v \times t$	20,000 MWh	Renewable energy production (i.e. 5000 equivalent households)	7
c) Electrification of the residual fuels					
13	Transition to electric systems	n x E_h x e	42,000 MWh	Residual energy demand (i.e. 3500 equivalent households)	15
		n x E_d x i	11,000 MWh	Additional electricity demand (i.e. 2700 equivalent households)	
14	Transition to electric mobility	n	4500	Involved households	
		d	16100 km/house	Avoided distance travelled by car	20
		E_v	7000 MWh	Additional electricity demand (i.e. 1700 equivalent households)	
d) Removals of GHG emissions (Carbon uptake by vegetation)					
15	Carbon uptake by ecosystems	GS	169 ha	Forestland needed to compensate the residual CF	25

supported by renewable sources (actions 11 and 12). Besides the proactive involvement of citizens, these measures would require a significant innovation of infrastructures and processes that can be accomplished in the long term.

d) Removals of CO_2 emissions (carbon uptake by vegetation): an additional action for decarbonisation concerns the valorization of ecosystem services, such as CO_2 absorption. In particular, the residual GHG emission due to waste and water management (i.e. a kind of entropy that cannot be fully avoided) can be compensated by carbon uptake (15). Urban forestry is among the recommended actions to finally achieve a condition of carbon neutrality.

Table 5 shows the size of every intervention in a sequence of simulated measures to test the carbon accounting framework. Most of the solutions concern a certain number of dwellings involved in order to estimate the effect of each measure based on the household as functional unit (bottom-up approach). This number is arbitrary but assumes reliable penetration rates (from 10% to 60%) of planned policies (100% is avoided to guarantee a prudential and more realistic approach). Some other policies refer to the neighborhood scale (top-down approach; e.g. solar and wind farms to support the comprehensive electricity demand). In this case the number of equivalent households allows to figure out the intervention size even if it has been determined based on the comprehensive demand of the neighborhood (this is especially useful after the transition to electrical systems and mobility). The simulation is coherent with the description given per each measure in Table 4 (see the "estimated parameter ranges") and is useful to understand how the accounting system works simultaneously at different scales, from that of the household to the neighborhood and beyond.

3. Results

3.1. Carbon accounting of the average European household and neighbourhood

Table 6 shows the Carbon Footprint of the average EU-28 household, as well as the activity data and Carbon Footprint of the hypothetical neighbourhood. The assessment has been performed by referring to the EFs for different emission sources in Table 1, including electricity (Table 2).

The total impact, in terms of carbon emissions, for the typical household corresponds to 6.93 t CO_2-eq per year. Once profiled the typical house, the impact of the neighbourhood has been determined just by considering the number of households and results show the emission intensity per different sectors: energy use for housing and mobility, domestic waste and water management. In its present state, the gross emissions of the neighborhood are 69,256 t CO_2-eq.

Table 6 shows both data referring to the single household and the neighbourhood. Since we hypothesized a neighbourhood of 10,000 households, CF values for the household and the neighbourhood may look redundant (just a multiple of 10 units) but the structure of this table is shown anyhow as useful requisite to perform the following assessment of CF mitigation measures allowing for easily estimating their effects depending on the spatial

Table 6
Carbon Footprint of the EU-28 household and Activity data and Carbon Footprint of EU-28 neighbourhood of 10,000 households.

Human activity	EU-28 HOUSEHOLD	Unit	EU-28 NEIGHBOURHOOD	EU-28 NEIGHBOURHOOD	Percentage
	CF		Activity data	CF	
	kg CO_2-eq			t CO_2-eq	
ENERGY (housing)	**3554**	**kWh_e[b]/yr**	**157,040,000**	**35,547**	**51.33%**
Electricity	**1481**	**kWh_e/yr**	**39,690,000**	**14,813**	**21.39%**
lighting, appliances	894	kWh_e/yr	23,850,000	8937	12.90%
cooling	29	kWh_e/yr	780,000	292	0.42%
cooking	165	kWh_e/yr	4,390,000	1645	2.38%
heating	229	kWh_e/yr	6,120,000	2293	3.31%
DHW	165	kWh_e/yr	4,390,000	1645	2.38%
RES[a] electricity	0	kWh_e/yr	160,000	0	0.00%
Fuels	**2073**	**kWh_h[c]/yr**	**117,350,000**	**20,734**	**29.94%**
Natural Gas - heating	1082	kWh_h/yr	42,990,000	10,820	15.62%
Natural Gas - DHW	241	kWh_h/yr	9,570,000	2409	3.48%
Natural Gas - cooking	71	kWh_h/yr	2,820,000	710	1.02%
Petroleum - heating	569	kWh_h/yr	20,240,000	5693	8.22%
Petroleum - DHW	79	kWh_h/yr	2,820,000	793	1.15%
Petroleum - cooking	31	kWh_h/yr	1,100,000	309	0.45%
RES - heating	0	kWh_h/yr	32,320,000	0	0.00%
RES - DHW	0	kWh_h/yr	5,020,000	0	0.00%
RES - cooking	0	kWh_h/yr	470,000	0	0.00%
MOBILITY	**2728**	**km/yr**	**161,000,000**	**27,281**	**39.39%**
passenger car - petrol	1274	km/yr	74,060,000	12,740	18.40%
passenger car - diesel	1411	km/yr	83,720,000	14,113	20.38%
passenger car - LPG	43	km/yr	3,220,000	427	0.62%
WASTE	**564**	**kg/yr**	**10,948,000**	**5642**	**8.15%**
% waste-to-energy	357	kg/yr	3,081,862	3575	5.16%
% waste-to-energy	190	kg/yr	2,920,926	1904	2.75%
% organic	16	kg/yr	1,794,377	163	0.23%
% recycling	0	kg/yr	3,150,834	0	0.00%
WATER	**79**	**m^3/yr**	**1,343,200**	**786**	**1.13%**
m^3 per yr (house)	79	m^3/yr	1,343,200	786	1.13%
TOTAL	**6926**			**69,256**	

[a] RES = Renewable Energy Sources.
[b] kWh of electricity produced (hereafter kWh_e).
[c] kWh of heat produced (hereafter kWh_h).

scale of interventions (some measures, such as the retrofitting of envelopes, refer to single households, and some other to the whole neighbourhood, e.g. renewable energy production). Both scales (the household and the neighbourhood) must be simultaneously taken into account to process data concerning CF mitigation measures within a correct systems approach.

3.2. Carbon mitigation accounting

The hypothetical scenario applying to the average European neighborhood presented in this study builds on a combination of 15 measures. Table 7 shows the estimated effects in terms of primary data and avoided GHG emissions, starting from the initial condition (69,256 t CO_2-eq for the EU-28 neighborhood, see also Table 6).

This hypothetical scenario demonstrates that urban systems in Europe can be radically transformed through setting proper action plans applying to different sectors and relating to different spatial and time scales. The integrated set of interventions, including the generation of 50 GWh electricity by PV panels and wind farms (measures 11 and 12), brings the CF of the neighborhood to 2281 t CO_2-eq/yr (97% less than the initial impact). The sequence shows that actions concerning resource (waste and water) and energy saving can potentially decrease the CF by 35%, while renewable energy generation contributes by 38% and the transition to electrical systems by 24%. As a final step (measure 15), the forestation of 169 ha, such as marginal areas or even remote brownfields, would allow for compensating the residual CF (3%) and potentially bring the neighborhood to carbon neutrality in the long run.

3.3. Spatial visualisation of the carbon accounting

Aiming at better understanding intensity and size of impacts, the quantity of greenhouse gases annually released into the atmosphere per household (6.93 t CO_2-eq) can be represented in terms of virtual forestland, the area covered by a relatively young forest that would be needed to absorb an equivalent amount of CO_2. The carbon emissions of the average European household correspond to the carbon uptake of 0.51 ha of forestland. This assessment considers average 1.35 kg CO_2 m^{-2} yr^{-1} carbon uptake (item 35 in Table 1). Given the size of a football field is around 0.4 ha, each house should have a backyard forest of 1.3 football fields.

Fig. 1 shows on the same spatial scale an iconic layout of the hypothetical European neighbourhood (a common typology for urban sprawl: 150 ha, hosting average 150 resident/ha density) and its 5130 ha of virtual forestland. The area of forestland is about 34 times bigger than the surface of the neighbourhood itself.

The representation by means of squares (25 ha each) allows the estimation of carbon mitigation effects that can be achieved by combining different measures (Fig. 2). The sequence of actions would therefore progressively crunch the CF of the neighbourhood and show how the action plan would potentially bring impacts to zero. Moreover, the representation in grey scale allows to show the effect on different emission sources (i.e. electricity and natural gas for housing, fuels for mobility, waste and water) and to better understand transition processes: for example, every transition from fossil fuels to electric systems (e.g. heat pumps; electric mobility) provides the replacement of fossil fuels with electricity and therefore an increase of the electricity demand to be supplied by renewables.

Table 7
GHG emissions reduciton due to the activation of environmental policies.

n.	CF mitigation measure	*Electricity*	*Lighting, appliances*	*Cooling*	*Cooking*	*Heating*	*DHW*	*RES electricity*	*Fuels*	*Heating*	*DHW*	*Cooking*	*Mobility*	*Waste*	*Water*	**CFav.**	CF
		MWh_e/yr	MWh_e/yr	MWh_e/yr	MWh_e/yr	MWh_e/yr	MWh_e/yr	MWh_e/yr	MWh_h/yr	MWh_h/yr	MWh_h/yr	MWh_h/yr	km/yr	t/yr	m^3/yr	t CO_2-eq/yr	t CO_2-eq/yr
0	**Neighbourhood at the current state**	39,690	*23,850*	*780*	*4390*	*6120*	*4390*	*160*	117,350	*63,230*	*12,390*	*3920*	161,000,000	10,948	1,343,200	**69,256**	69,256
a)	**Saving electricity, fuels, waste and water**																
01	Building shading and UHIE mitigation	–47		*–47*												**–18**	69,238
02	Building envelope retrofitting	–1718		*–250*		*–1469*			–15,175	*–15,175*						**–4607**	64,631
03	LED lamps	–1431	*–1431*													**–536**	64,095
04	Bike/walk to school, work												–24,150,000			**–4092**	60,003
05	Public transport												–64,400,000			**–10,912**	49,091
06	Waste reduction and increased recycling													–1109		**–1287**	47,804
07	Lower landfilled and incinerated waste													–2725		**–2669**	45,135
08	Water use reduction														–537,280	**–314**	44,821
b)	**Installation of varies renewable energy sources**																
09	Biomass to energy cogeneration	–4501						*–4501*	–10,023	*–8536*	*–1487*					**–4293**	40,528
10	District Heating Network								–12,027	*–10,243*	*–1784*					**–3136**	37,392
11	PV on roofs	30,000						*–30,000*								**–11,197**	26,195
12	Wind turbines	20,000						*–20,000*								**–7465**	18,730
c)	**Electrification of the residual fuels**																
13	Transition to electric systems	11,190							–42,156	–33,512	–6567	*–2078*				**–6796**	11,934
14	Transition to electric mobility	7001											–72,450,000			**–9653**	2281
d)	**Removals of GHG emissions (Carbon uptake by vegetation)**																
15	Carbon uptake by ecosystems															**–2281**	0

During testing workshops in European Cities and presentation to wide audience, this visualisation has been enhanced by adding the icons of a pacman-like character, crunching the CF squares, and ghosts (when energy transitions call for additional electricity demand the ghost appears adding new squares), inspired by the famous videogame. This graphical visualisation in space of the CF of the neighbourhood has become an effective tool for communication and awareness raising among citizens and stakeholders during City-Zen roadshows (van den Dobbelsteen et al., 2018; Pulselli et al., 2018).

4. Discussion

The GHG emissions of a typical European neighbourhood have been estimated based on a bottom-up process, by assessing the CF of a single household (i.e. 6.93 t CO_2-eq/yr). This impact includes a limited set of activities, concerning housing (51.3% emission: 21.4% electricity, 29.9% fossil fuels), mobility (39.4%), domestic waste treatment (8.2%) and tap water use (1.1%). Presented results refer to average European values and can significantly change from case to case according to climate and physical conditions of the built environment, cultural, social and economic contexts. For example, cooling energy will be much higher in southern European countries where there is relatively lower heat demand while the latter will be much more relevant in the North. Age and quality of building envelopes highly condition the heat demand and also the possibility of interventions (e.g. historical centres would require very specific policies due to architectural conservation). Urban density and connecting infrastructures determine different impacts of mobility: low density neighbourhoods often require almost exclusively private car use by the residents and the GHG emissions due to fuels can easily overcome that of housing; on the contrary, high density neighbourhoods often allow for a higher concentration of urban utilities and services within a walking distance and more efficient public transportation systems and infrastructures. The impact of waste collection and treatment depends on individual behaviours (e.g. waste differentiation) but also on the waste management system adopted in the wider region. The proposed framework is able to detect the real state of carbon emissions, based on the inventory of site-specific data, and therefore the elaboration procedure that has been developed has a high potentiality of replicability in European neighbourhoods. Moreover, also the selection and design of mitigation measures depend on different urban contexts; for example the area of available flat roofs for PV installation, the energy potentials (e.g. wind speed, geothermal heat), the existing infrastructural facilities and services are site specific conditions that affect the plan and provide the real parameters to be processed in the equations framework.

Activity sectors included in the Carbon Accounting framework allow for assessing the contribution of most significant emission sources that can be the object of specific measures and therefore for planning strategies for decarbonisation concerning housing, mobility, waste and water resources and referring to different spatial and temporal scales. Moreover, results deal with daily life aspects that citizens know well and therefore contribute to raise awareness about their behaviour and the opportunity to change for the Planet. Besides others, measures such as greening and shading facades (measure 1 in Table 4), optimising the use of lights and appliances (measures 4 and 5 in Table 4), walking/cycling to school/work (measure 17 in Table 4), car-pooling (measure 18 in Table 4), using public transport (measure 19 in Table 4), could be potentially applied since tomorrow with no investments, just by inducing citizens to change their lifestyle. The role of communication, that the proposed framework contributes to support as shown in the 3.3 section, for the consciousness of citizens is therefore crucial.

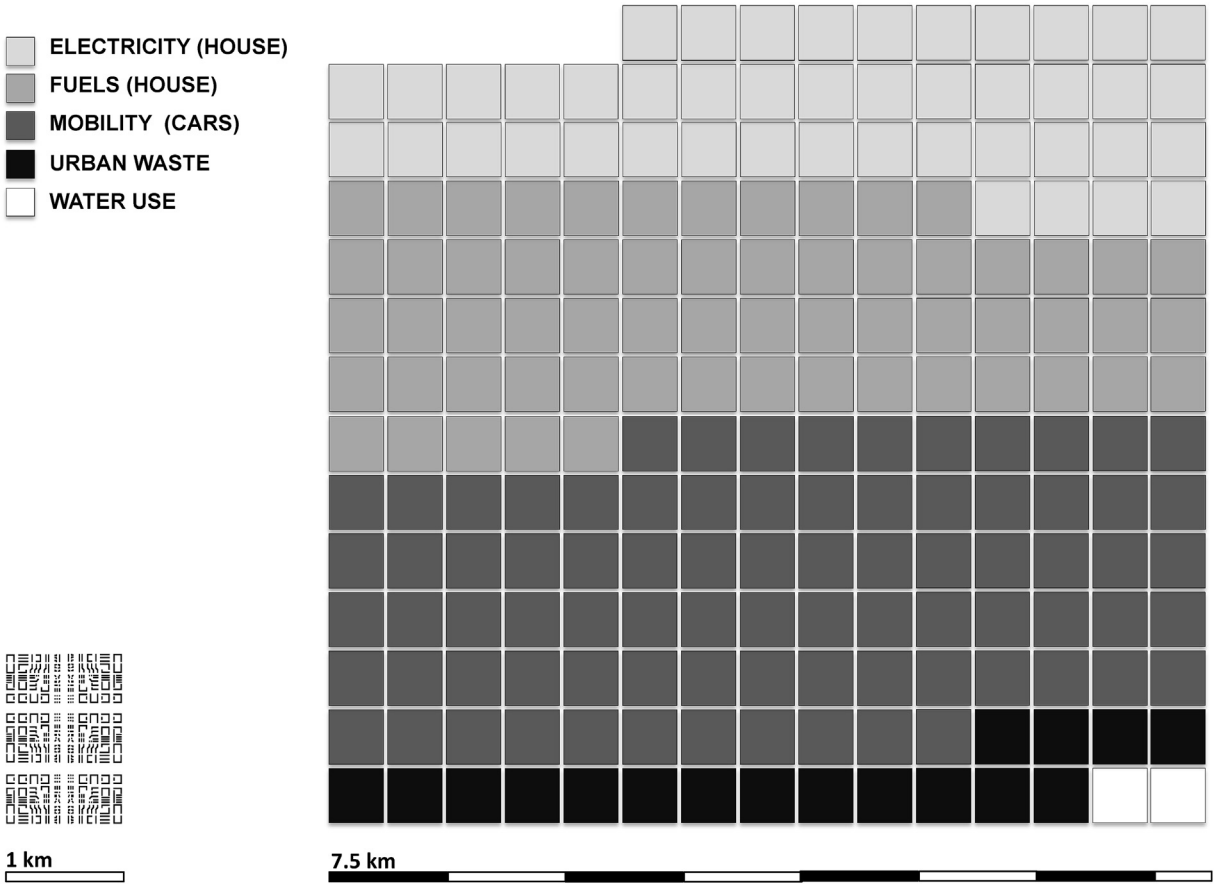

Fig. 1. Carbon Footprint offset, i.e. virtual forestland (5130 ha) of the average European neighbourhood (23,000 inhabitants, 150 ha).

The visualisation of results through the virtual forestland has been tested during the City-Zen roadshows (van den Dobbelsteen et al., 2018). It expresses the equivalent area covered by a growing forest to absorb GHG emissions provided by the neighbourhood and contribute to make outcomes from the Carbon Accounting spatially explicit and understandable: the forestland (5130 ha) is 34 times bigger than the area of the neighbourhood (150 ha). This communication outcome has looked as very surprising and worrying to the eyes of any audience. A necessary observation is that the forestland represented in Fig. 1 does not provide the whole picture but just a part of it.

Some elements of the comprehensive Carbon footprint have not taken into account such as the impact of lifecycle processes for food and goods consumption. For example, the impact of mobility accounts for fuel use but not for the lifecycle processes of private cars (i.e. their manufacturing, maintenance and end-of-life). Moreover, the activity data of the inventory is currently limited to the residential sector: housing, private cars, domestic waste and water; indeed commercial or productive activities have not taken into account such as, for example, office buildings and shops or the street public lighting. Specific surveys on tertiary or industry located in the neighbourhood could be implemented and added into the assessment framework depending on data availability (not to give for granted). Consequently, we can reasonably imagine that the CF of neighbourhoods would be much increased, easily doubled or more, by including also these aspects in the assessment. Consequently new sets of scenarios and policies concerning dietary shifts, short-chain products, circular economy, should be investigated.

Furthermore, the same approach could be implemented with different or complementary indicators, together with the carbon footprint. One example is the traditional Ecological Footprint, as stated by the Global Footprint Network (Galli et al., 2016). Another example can concern an estimate of possible economic investments associated to each measure; this would allow for measuring the cost of decarbonisation scenarios and also evaluate the investment ratio (i.e. invested € per avoided kg of CO_2-eq). An input-state-output scheme as theorised by Pulselli et al. (2015) and Neri et al. (2017) to investigate sustainability of nations and regions can be also taken as reference for implementing a combined set of three systems indicators concerning input (resource use; the Carbon Footprint belongs to this item since it can be a proxy for energy use), state (social organisation, density and quality of infrastructures and services) and output (citizen welfare) focussing on any specific neighbourhood.

As stated before, the current framework has been tested during workshops throughout European cities (van den Dobbelsteen et al., 2018; Pulselli et al., 2018), under the City-Zen Project. The so called City-Zen roadshows has focused on specific neighbourhoods selected by the hosting municipality and have a strict timetable: field visit and site-specific data collection on Monday, 3 days elaboration from Tuesday to Thursday, final presentation of results on Friday morning. Outcomes include short-medium-long term measures and policies and the scenarios towards carbon neutrality in Figs. 1 and 2. The short timing of workshops, made together with local stakeholders and facilitators, demonstrated that this Carbon Accounting mediate model can be a powerful tool for showcasing the effects of ambitious but reliable action plans for decarbonisation of neighbourhoods in different European cities and regional contexts.

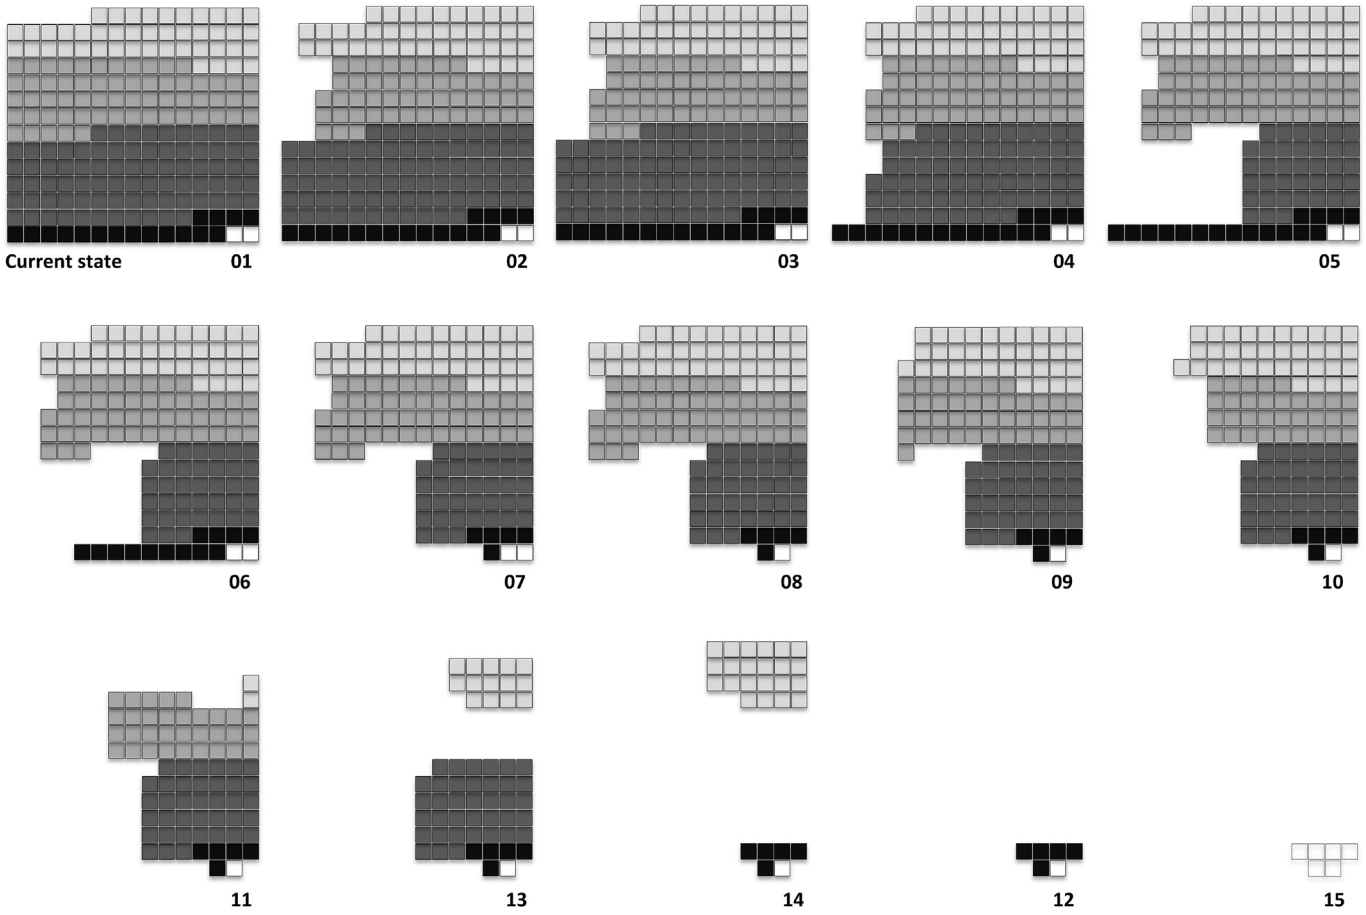

Fig. 2. Visualisation of the long term Carbon Footprint mitigation scenario based on virtual forestland of the average European neighbourhood (23,000 inhabitants). Numbers refer to the measures listed in Table 7; the number 0 is the current state; the number 15 represents the compensation by carbon uptake (needed forestation area). Action 01 does not provide visible effects in decreasing GHG emissions, compared to the current state. Action 12 is postponed after actions 13 and 14 that require an increase of electricity demand.

5. Conclusion

The methodology presented in this study is conceived as a carbon accounting tool to understand the environmental implications of citizen behaviours and address choices for climate action in urban neighbourhoods. The different steps of the procedure go from the selection of Emission Factors, including the specific calculation of the electricity grid mix, to the assessment of the Carbon Footprint (CF), until the estimate of the Carbon Footprint mitigation effects of a hypothetical action plan. In particular, the equations framework proposed refers to a series of policies and measures for decarbonisation in built environments concerning energy for housing and mobility, waste and water management.

The assessment process has been demonstrated referring to a theoretical European neighbourhood (10,000 households; 23,000 inhabitants), based on average values from statistical datasets, in order to provide a reference benchmark for any kind of future application.

The CF per household, taken as functional unit, is 6.93 t CO_2-eq, equivalent to 0.51 ha of forestland that corresponds to the extension of 1.3 football fields. This conversion into forestland provides an alarming representation of the impact of citizen lifestyles in contemporary cities, e.g. the virtual forestland of 5130 ha is 34 times bigger than the neighbourhood area. Nevertheless, it also allows for visualising the effects of mitigation strategies concerning different spatial scales, from neighbourhoods to households until individual citizens, and temporal horizons (short-, medium-, long-term). This dynamic representation looks quite challenging and engaging to the eyes of any audience and can contribute to support awareness raising campaigns for the engagement of citizens and stakeholders.

The combination of the assessment process with the visualisation of outcomes establishes an effective “mediate model” able to inform participative design processes and drive the energy transition of European cities. It is intended as a replicable methodology to be transferred and applied to European neighbourhoods and glaringly kick-off their decarbonisation processes.

Acknowledgments

The present study has been developed for implementing the activities of the City-Zen Project that has received funding from the European Union's Seventh Programme for research, technological development and demonstration under grant agreement No 608702. In particular, the authors thank the colleagues of the City-Zen roadshow team for their precious work and support and the equipe of researchers of the Ecodynamics Group for their constant collaboration.

References

Agrawal, N., Pandit, U.S., Pawar, D.D., Aher, M.A., Fulpagare, Y.S., 2012. Experimental investigation of energy conservation in building employing natural cooling techniques. Int. Conf. Global Technol. Initiat. 1, 180–184.
Akbari, H., Pomerantz, M., Taha, H., 2001. Cool surfaces and shade trees to reduce

energy use and improve air quality in urban areas. Sol. Energy 70 (3), 295–310.
Ancona, M.A., Branchini, L., Di Pietra, B., Melino, F., Puglisi, G., Zanghirella, F., 2015. Utilities substations in smart district heating networks. Energy Proced. 81, 597–605.
ANPA CTN-ACE, 2002. Manuale dei fattori di emissione nazionali. Centro Tematico Nazionale Atmosfera, Clima ed Emissioni in Aria. (Handbook of national emission factors). http://www.sinanet.apat.it/it/inventaria/disaggregazione-2000/db.
Baig, H., Sellami, N., Bahaidarah, H., Mallick, T., 2013. Optical analysis of a CPC based CPV/T system for application in the kingdom of Saudi Arabia. In: 28th European Photovoltaic Solar Energy Conference and Exhibition, pp. 653–657.
Bastianoni, S., Marchi, M., Caro, D., Casprini, P., Pulselli, F.M., 2014. The connection between 2006 IPCC GHG inventory methodology and ISO 14064-1 certification standard – a reference point for the environmental policies at sub-national scale. Environ. Sci. Pol. 44, 97–107.
Bosanac, M., Sørensen, B., Katic, I., Sørensen, H., Nielsen, B., Badran, J., 2003. Photovoltaic/Thermal Solar Collectors and Their Potential in Denmark. Final Report EFP project 1713/00-0014, p. 114.
Cheng, C.L., 2002. Study of the inter-relationship between water use and energy conservation for a building. Energy Build. 34 (3), 261–266.
Cheung, C.S., Hung, W.T., Yuen, D.W., 2015. Pilot Green Transport Fund - Final Report on Trial of Electric Van for Emergency Vehicle Rescue Service (HKAA). Report, p. 7.
City-Zen Project, 2018. City-zen: New Urban Energy. http://www.cityzen-smartcity.eu/home/about-city-zen/objectives/.
CNCA, 2018. A Global Collaboration of Cities Cutting Emissions by 80% or More, by 2050 or Sooner. Carnbon Neutral Cities Alliance - a Project of the Urban Sustainability Directors Network. https://www.usdn.org/public/page/13/CNCA.
Covenant of Mayors, 2016. The Covenant of Mayors for Climate and Energy Reporting Guidelines. Covenant of Mayors & Mayors Adapt Offices, Joint Research Centre of the European Commission, p. 68. Report, Version 1.0.
Darby, S., 2006. The Effectiveness of Feedback on Energy Consumption. A Review for Defra of the Literature on Metering, Billing and Direct Displays. Environmental Change Institute, University of Oxford Report, p. 21.
Deng, Z., Mol, S., van der Hoek, J.P., 2016. Shower heat exchanger: reuse of energy from heated drinking water for CO_2 reduction. Drink. Water Eng. Sci. 9, 1–8.
EAL, 2011. Energia Alternativa Laboratory. www.energialternativa.org/mobile/MobileEA.php?num=1319163361.
Ecoinvent 3, 2015. The Ecoinvent Database.
EEA, 2016. Progress on Energy Efficiency in Europe. https://www.eea.europa.eu/data-and-maps/indicators/progress-on-energy-efficiency-in-europe-2/assessment-2.
Energy Expert, 2011. Geotermia e Pompe di Calore. http://www.energyexpert.it/impianti-di-climatizzazione-aria/geotermia-e-pompe-di-calore.
EU, 2007. Limiting Global Climate Change to 2 Degrees Celsius—The Way Ahead for 2020 and beyond. Communication of the Commission to the Council, the European Parliament, the European Economic and Social Committee and the Committees of the Regions, Commission of the European Communities, Brussels. http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=COM:2007:0002:FIN:EN:PDF.
EU, 2011. A Roadmap for Moving to a Competitive Low Carbon Economy in 2050. Communication from the Commission to the European Parliament, the Council, the European Economic and Social Committee and the Committee of the Regions. Commission of the European Communities, Brussels. http://eur-lex.europa.eu/legal-content/EN/TXT/PDF/?uri=CELEX:52011DC0112&from=EN.
EU, 2013. EU Energy, Transport and GHG Emissions Trends to 2050 – Reference Scenario 2013. European Commission, Directorate-General for Energy, Directorate-General for Climate Action and Directorate-General for Mobility and Transport.
EU, 2018. 2050 Low-carbon Economy. https://ec.europa.eu/clima/policies/strategies/2050_en.
EU JRC, 2018. Photovoltaic Geographical Information System – Interactive Maps. http://re.jrc.ec.europa.eu/pvgis/apps4/pvest.php?lang=en&map=europe.
Eurostat, 2015a. Electricity and Heat Statistics. http://ec.europa.eu/eurostat/statistics-explained/index.php/Electricity_and_heat_statistics.
Eurostat, 2015b. Energy Consumption in Households. http://ec.europa.eu/eurostat/statistics-explained/index.php/Energy_consumption_in_households.
Eurostat, 2015c. Passenger Cars in the EU. http://ec.europa.eu/eurostat/statistics-explained/index.php/Passenger_cars_in_the_EU.
Eurostat, 2016. Municipal Waste Statistics. http://ec.europa.eu/eurostat/statistics-explained/index.php/Municipal_waste_statistics.
Frank, Y., Guarnieri, T., Quan, C., Selkowitz, S., 2015. Living lab NYC: advancing lighting controls in iconic office towers. In: Presentation to the Lightfair International 2015 Conference, May 3–7, New York.
GAA, 2015. Auto elettriche: consumi e autonomie reali. Tutela ambientale, mobilità sostenibile e gestione gruppi di acquisto per auto elettriche e auto ibride. https://www.gruppoacquistoauto.it/approfondimenti/auto-elettriche-consumi-e-autonomie-reali/.
Galli, A., Giampietro, M., Golfinger, S., Lazarus, E., Lin, D., Saltelli, A., Wackernagel, M., Müller, F., 2016. Questioning the ecological footprint. Ecol. Indicat. 69, 224–232.
Ghisolfi, G., 2008. Biocarburanti di Seconda Generazione Biocarburanti di Seconda Generazione. La Sfida dell'Imprenditoria Italiana. http://www.globalbioenergy.org/fileadmin/user_upload/gbep/docs/2008_events/Rome_2008/Ghisolfi_presentation.pdf.
INFC, 2005. Inventario Nazionale delle Foreste e dei Serbatoi Forestali di Carbonio. (National Inventory of Forestland and Carbon sequestration in forests). https://www.sian.it/inventarioforestale/.
IPCC, 2006. 2006 IPCC Guidelines for national greenhouse gas inventories. In: Eggleston, H.S., Buendia, L., Miwa, K., Ngara, T., Tanabe, K. (Eds.). IGES, Japan.
IPCC, 2013. Climate Change 2013: the Physical Science Basis. Working Group I Contribution to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change. Cambridge University Press.
Kennedy, S., Sgouridis, S., 2011. Rigorous classification and carbon accounting principles for low and Zero Carbon Cities. Energy Pol. 39, 5259–5268.
King, J., Perry, C., 2017. Smart Buildings: Using Smart Technology to Save Energy in Existing Buildings. American Council for an Energy-Efficient Economy, p. 46. Report.
Koch, A., Girard, S., McKoen, K., 2012. Towards a neighbourhood scale for low- or zero-carbon building projects. Build. Res. Inf. 40 (4), 527–537.
Lehmann, S., 2013. Low-to-no carbon city: lessons from western urban projects for the rapid transformation of Shanghai. Habitat Int. 37, 61–69.
LifeGate, 2018. Il Portogallo è stato alimentato al 100% da rinnovabili per un mese intero. https://www.lifegate.it/persone/stile-di-vita/portogallo-solo-rinnovabili-marzo.
Manzini, R., Pareschi, A., 2012. A decision-support system for the car pooling problem. J. Transport. Technol. 2, 85–101.
Marchi, M., Jørgensen, S.E., Pulselli, F.M., Marchettini, N., Bastianoni, S., 2012. Modelling the carbon cycle of Siena province (tuscany, central Italy). Ecol. Model. 225, 40–60.
Marchi, M., Pulselli, R.M., Marchettini, N., Pulselli, F.M., Bastianoni, S., 2015. Carbon dioxide sequestration model of a vertical greenery system. Ecol. Model. 306, 46–56.
Marchi, M., Pulselli, F.M., Mangiavacchi, S., Menghetti, F., Marchettini, N., Bastianoni, S., 2017a. The greenhouse gas inventory as a tool for planning integrated waste management systems: a case study in central Italy. J. Clean. Prod. 142, 351–359.
Marchi, M., Niccolucci, V., Pulselli, R.M., Marchettini, N., 2017b. Urban sustainability: CO_2 uptake by green areas in the historic centre of Siena. Int. J. Des. Nat. Ecodyn. 12 (4), 407–417.
Marchi, M., Niccolucci, V., Pulselli, R.M., Marchettini, N., 2018. Environmental policies for GHG emissions reduction and energy transition in the medieval historic centre of Siena (Italy): the role of solar energy. J. Clean. Prod. 185, 829–840.
Marique, A.F., Reiter, S., 2014. A simplified framework to assess the feasibility of zero-energy at the neighbourhood/community scale. Energy Build. 82, 114–122.
Neri, L., D'Agostino, A., Regoli, A., Pulselli, F.M., Coscieme, L., 2017. Evaluating dynamics of national economies through cluster analysis within the input-state-output sustainability framework. Ecol. Indicat. 72, 77–90.
Nordic Heating, 2015. How to Calculate Coefficient of Performance. https://www.nordicghp.com/2015/08/how-to-calculate-coefficient-of-performance/.
NV energy, 2018. Free Smart Thermostat. https://www.nvenergy.com/save-with-powershift/smart-thermostat.
OE, 2018. I Principi Dell'eolico. Orizzonte Energia. http://orizzontenergia.it/testi.php?id_testi=15.
Poundex, P., 2008. The effect of transportation policies on energy consumption and greenhouse gas emission from urban passenger transportation. Transport. Res. Pol. Pract. 42 (6), 901–909.
Premalatha, M., Tauseef, S.M., Abbasi, T., Abbasi, S.A., 2013. The promise and the performance of the world's first two zero carbon eco-cities. Renew. Sustain. Energy Rev. 25, 660–669.
Protocol, G.H.G., 2014. Global Protocol for Community-scale Greenhouse Gas Emissions Inventories. An Accounting and Reporting Standard for Cities. Report, p. 174. http://www.nlc.org/sites/default/files/SCI%20Documents/GHGP_GPC%20%281%29.pdf.
Pulselli, F.M., Coscieme, L., Neri, L., Regoli, A., Sutton, P.C., Lemmi, A., Bastianoni, S., 2015. The world economy in a cube: a more rational structural representation of sustainability. Global Environ. Change-Human Pol. Dimen. 35, 41–51.
Pulselli, R.M., Maccanti, M., Marrero, M., van den Dobbelsteen, A., Martin, C., Marchettini, N., 2018. Energy transition for decarbonisation of urban neighborhoods: a case study in Seville. In: Brebbia, C.A., Marchettini, N., Passerini, G. (Eds.), Sustainable Development and Planning X, Transactions on Ecology and the Environment, vol. 217 (in press).
Qian, X., Lee, S.W., 2014. The design and analysis of energy efficient building envelopes for the commercial buildings by mixed-level factorial design and statistical methods. In: Middle Atlantic American Society of Engineering. Conference.
Regione Emilia Romagna, 2013. Patto dei Sindaci: Schede metodologiche per il calcolo delle riduzioni di CO_2-eq, dei risparmi energetici e della produzione di energia rinnovabile (Report).
SEI, 2018. Generatore Microeolico. Società Elettrica Italiana. http://www.societaelettricaitaliana.it/generatore_microeolico_SEI_BNY_3kW.htm.
Self, S.J., Reddy, B.V., Rosen, M.A., 2013. Geothermal heat pump systems: status review and comparison with other heating options. Appl. Energy 101, 341–348.
Shaheen, S.A., Lipman, T.E., 2007. Reducing greenhouse emissions and fuel consumption: sustainable approaches for surface transportation. IATSS Res. 31 (1), 6–20.
Siena Ambiente, 2015. Report Ambientale – Impianto termovalorizzatore Pian dei Foci. http://www.sienambiente.it/wp-content/uploads/2013/09/REPORT-ANNUALE-AMBIENTALE-TRM-2015-PDF.PDF-medcom23795.pdf.

Skjærseth, J.B., 2016. Linking EU climate and energy policies: policy-making, implementation and reform. Int. Environ. Agreements Polit. Law Econ. 16 (4), 509–523.

Smart Home, 2017. 5 Best Smart Thermostats Keeping Energy and Costs Cool in 2017. https://www.smarthomebeginner.com/best-smart-thermostats-2017/.

Sovacool, B., 2008. Valuating the greenhouse emissions from nuclear power: a critical survey. Energy Pol. 36, 2950–2963.

Stephan, A., Crawford, R.H., de Myttenaere, K., 2013. Multi-scale life cycle energy analysis of a low-density suburban neighbourhood in Melbourne, Australia. Build. Environ. 68, 35–49.

Tian, Y., Zhao, C.Y., 2013. A review of solar collectors and thermal energy storage in solar thermal applications. Appl. Energy 104, 538–553.

UN, 2015. World Urbanization Prospects - the 2014 Revision. United Nations, New York, p. 493. Report.

UN Human Settlements Programme, 2016. Urbanization and Development: Emerging Future. World Cities report 2016. Report, p. 247.

University of Strathclyde, 2018. Hybrid Energy Systems in Future Low Carbon Buildings. http://www.esru.strath.ac.uk/EandE/Web_sites/09-10/Hybrid_systems/solar-thermal.htm.

van den Dobbelsteen, A., Martin, C.L., Keeffe, G., Pulselli, R.M., Vandevyvere, H., 2018. From problems to potentials—the urban energy transition of Gruž, Dubrovnik. Energies 11 (4), 922.

Yan, X., Crookes, R.J., 2009. Reduction potentials of energy demand and GHG emissions in China's road transport sector. Energy Pol. 37 (2), 658–668.